


Panasonic ventilation solutions

Panasonic ventilation solutions for maximum savings and easy integration.



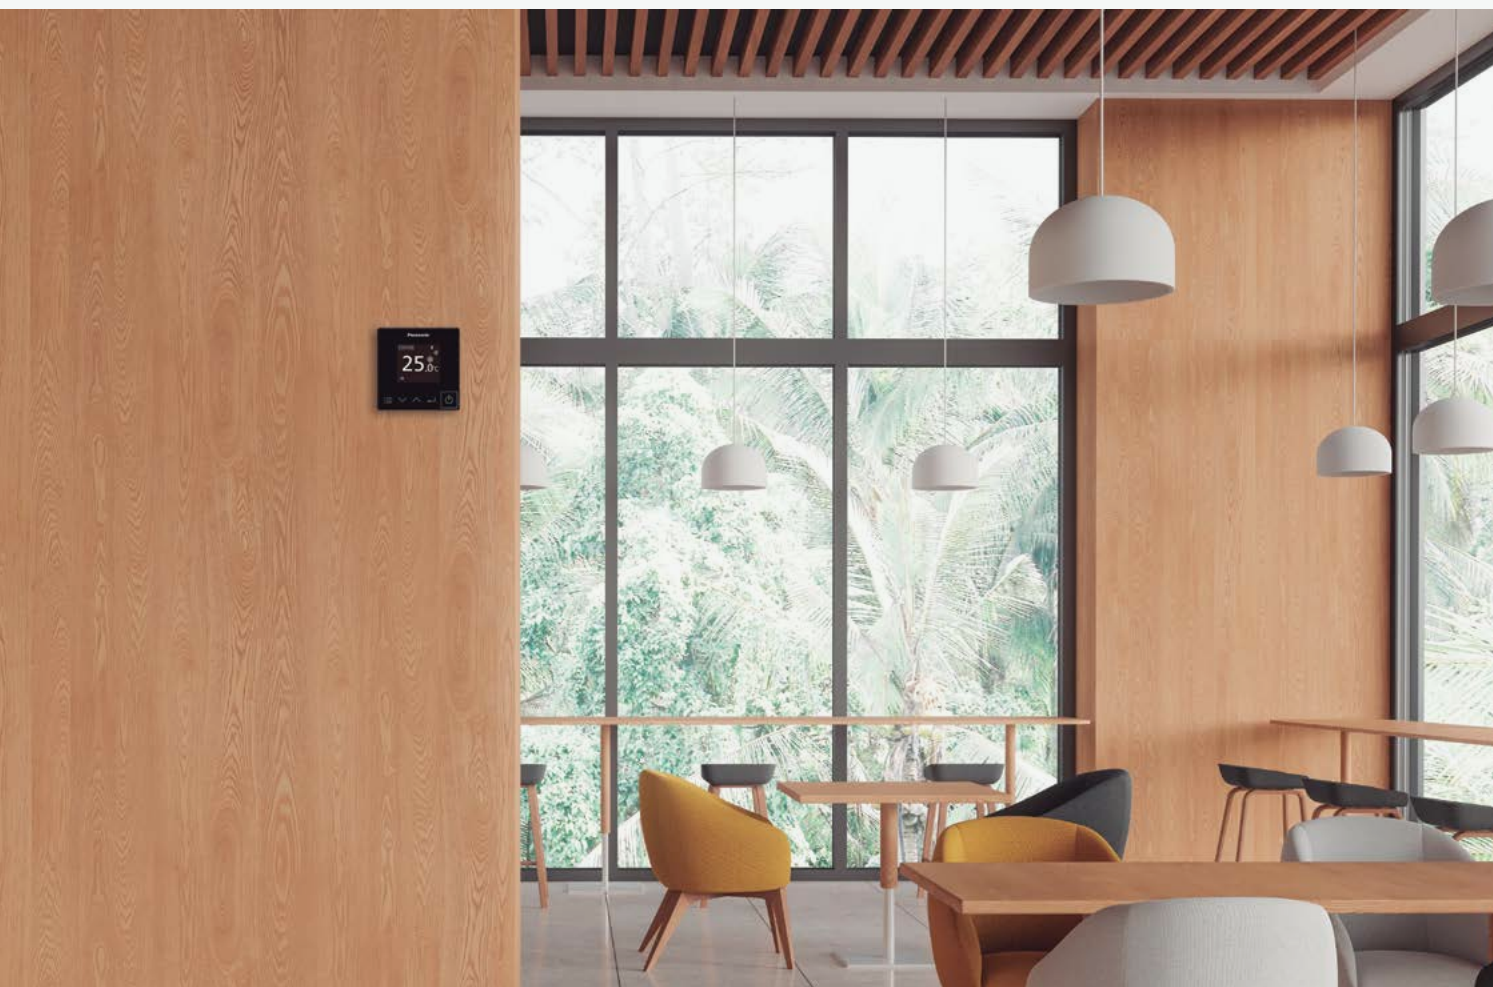

Air handling unit kit → 330

AHU connection kit PAH3M for PACi NX and PACi → 332

AHU connection kit MAH4M for ECOi 2-Pipe → 334

AHU connection kit MAH3M for ECOi and ECO G → 336

Energy recovery ventilation → 338

Advanced energy recovery ventilation - ZY Series → 339

Energy recovery ventilation - ZDY Series → 340

Energy recovery ventilation with DX coil - HRPT Series for VRF → 342

Energy recovery ventilation with DX coil - HRPT Series · R32 / R410A → 343

Heat recovery with DX coil - ZDX Series for VRF → 344

Heat recovery with DX coil - ZDX Series · R410A → 345

Electric air curtains → 346

Electric air curtain → 346

Air curtain with DX coil, connected to PACi NX and PACi → 348

Air curtain with DX coil, connected to VRF systems → 349

High pressure duct and 100% fresh air duct function → 350

E2 type high static pressure hide-away · R410A → 351

Ceiling mounted air-e nanoe X Generator → 352

Ceiling mounted air-e nanoe X Generator → 353

Residential ventilation

Heat recovery ventilation unit → 354

Counter flow ventilation → 356

Air handling unit kit

AHU connection kits connect outdoor units to air handling systems. Combines air conditioning and fresh air in just one solution.

Application: Hotels, offices, server rooms or all large buildings where air quality control, such as humidity control and fresh air, is needed.



AHU connection kit PAH3M-1 for PACi NX and PACi (2,5 - 23,2 kW*).

- Durable metal casing (IP 65) allows external installation
- 0-10 V demand control
- CONEX Bluetooth® control built-in (CZ-RTC6BL)
- Panasonic H&C Control App via Bluetooth®
- Easy integration to BMS

* Nominal cooling capacity.



NEW AHU connection kit MAH4M for ECOi 2-Pipe (16 - 45 kW*).

- Space-saving compact casing
- 0-10 V demand control
- Built-in controller for daily functions and service levels
- Direct Modbus communication without an additional interface
- Easy integration to BMS
- Accurate control with a pressure transducer

* Nominal cooling capacity.



AHU connection kit MAH3M for ECOi and ECO G (14 - 224 kW*).

- Durable metal casing (IP 65) allows external installation
- 0-10 V demand control
- CONEX Bluetooth® control built-in (CZ-RTC6BL)
- Panasonic H&C Control App via Bluetooth®
- Easy integration to BMS

* Nominal cooling capacity.



AHU connection kit line-up.

AHU connection kit	Reference	Casing	Controller	0-10 V demand control	Compatible outdoor units
PAH3M	PAW-280PAH3M-1	Durable metal casing (IP 65)	CONEX Bluetooth® control (CZ-RTC6BL)	Yes	PACi NX and PACi
NEW MAH4M	PAW-P+100MAH4M	Durable metal casing (IP 65)	Built-in c.pCO controller	Yes	Mini ECOi and ECOi EX 2-Pipe
MAH3M	PAW-160MAH3M PAW-280MAH3M PAW-560MAH3M	Durable metal casing (IP 65)	CONEX Bluetooth® control (CZ-RTC6BL)	Yes	Mini ECOi, all ECOi EX and all ECO G


AHU connection kit PAH3M for PACi NX and PACi

Compatible with R32 or R410A outdoor units.

The Panasonic AHU connection kits offer a wealth of connectivity possibilities, integrating easily into many systems.

Besides the advantages in terms of indoor air quality, air conditioning offers also an energy saving potential. For example, uncontrolled ventilation through open windows leads to large amounts of heat being lost to the outside during the heating season or gained from the outside during the cooling season. Whereas, combining heat recovery with air conditioning can allow for a high level of comfort whilst reducing the overall operating costs of running air conditioning alone. The larger area of the comfort range, the better the energy saving opportunities.


System example with AHU connection kit PAH3M and PACi NX or PACi outdoor unit

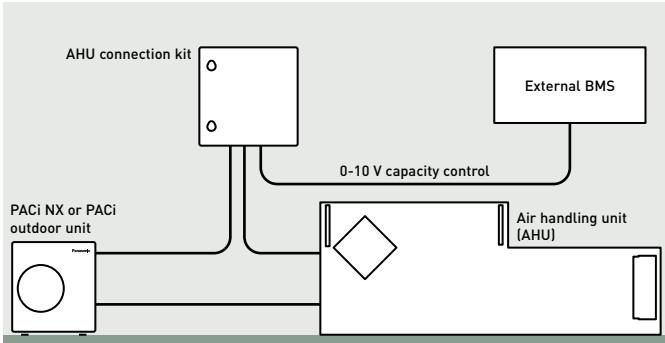

Demand control on the outdoor unit managed by external 0-10 V signal.

- AHU connection kit contains: IP 65 box with PCBs and terminal connections mounted inside, expansion valve and sensors
- Heat exchanger, fan and fan motor to be mounted in the AHU itself are field supplied

Main components of mechanical ventilation systems

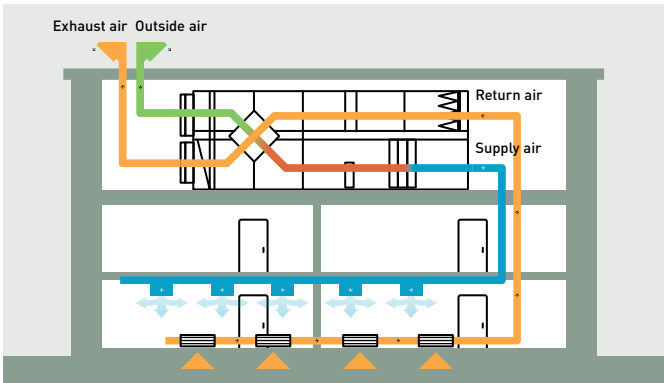

- Air handling unit (AHU)
- Air ducts
- Air distribution elements

Control options

Control option 1.

- The system's control is simple: control of actual suction temperature vs. set point
- Control works in the same way as that of any indoor unit
- Fan signal issued by the PCB (OFF while defrosting, for instance)

Control option 2.

- System control by a 0-10 V control working from an external BMS that manages the set point for temperature or capacity. Enhances efficiency by adjusting capacity and enhances comfort as well
- All signals as standard

0-10 V control

With the 0-10 V demand control the capacity of the outdoor unit can be controlled by 20 steps.

Input voltage* [V]	0	1,0	1,5	2,0	2,5	3,0	3,5	4,0	4,5	5,0	5,5	6,0	6,5	7,0	7,5	8,0	8,5	9,0	9,5
Demand [% of nominal current]	No cut ¹⁾	40	45	50	55	60	65	70	75	80	85	90	95	100	105	110	115	120	No limit / Full capacity ²⁾
Indoor unit start / stop	Stop ¹⁾	Start																	

1) No cut / stop: AHU system / indoor unit is completely switched OFF.

2) No limit: No restrictions applied by BMS to AHU system / indoor unit performance (equivalent to "full-load operation" of AHU system / indoor unit).

AHU connection kit.

PCB, power trans, terminal block.



Thermistor x2 (refrigerant: E1, E2).



Thermistor (air: TA; 1 sensor).



Wired remote controller. CZ-RTC6BL.



Optional controller.

Timer remote controller. CZ-RTC5B.



AHU connection kit PAH3M for PACi NX and PACi

CONEX




CONEX Bluetooth®
control built-in.
CZ-RTC6BL



PACi

PAW-280PAH3M-1			2,5 kW	3,6 kW	5,0 kW	6,0 kW	7,5 kW	10,0 kW	12,5 kW	14,0 kW	20,0 kW	25,0 kW
Dimension	H x W x D	mm	500 x 400 x 150	500 x 400 x 150	500 x 400 x 150	500 x 400 x 150	500 x 400 x 150	500 x 400 x 150	500 x 400 x 150	500 x 400 x 150	500 x 400 x 150	500 x 400 x 150
Net weight		kg	11,5	11,5	11,5	11,5	11,5	11,5	11,5	11,5	11,5	11,5
Piping diameter	Liquid	Inch (mm)	1/4 (6,35)	1/4 (6,35)	1/4 (6,35)	3/8 (9,52)	3/8 (9,52)	3/8 (9,52)	3/8 (9,52)	3/8 (9,52)	3/8 (9,52)	1/2 (12,70)
	Gas	Inch (mm)	1/2 (12,70)	1/2 (12,70)	1/2 (12,70)	5/8 (15,88)	5/8 (15,88)	5/8 (15,88)	5/8 (15,88)	5/8 (15,88)	1 (25,40)	1 (25,40)
Intake temperature of AHU connection kit	Cool Min ~ Max	°C DB	18 ~ 32	18 ~ 32	18 ~ 32	18 ~ 32	18 ~ 32	18 ~ 32	18 ~ 32	18 ~ 32	18 ~ 32	18 ~ 32
	Cool Min ~ Max	°C WB	14 ~ 25	14 ~ 25	14 ~ 25	14 ~ 25	14 ~ 25	14 ~ 25	14 ~ 25	14 ~ 25	—	—
	Heat Min ~ Max	°C	16 ~ 30	16 ~ 30	16 ~ 30	16 ~ 30	16 ~ 30	16 ~ 30	16 ~ 30	16 ~ 30	16 ~ 30	16 ~ 30
With PACi NX Elite												
Cooling capacity		kW	—	3,6	5,0	6,0	7,1	10,0	12,5	14,0	19,5	23,2
Heating capacity		kW	—	4,0	5,6	7,0	8,0	11,2	14,0	16,0	22,4	28,0
Air flow	Min / Max	m³/h	—	540/870	630/990	780/1320	780/1320	900/2160	1140/2280	1200/2400	2160/4320	2280/5040
Pipe length range		m	—	3 ~ 40	3 ~ 40	3 ~ 40	5 ~ 50	5 ~ 85	5 ~ 85	5 ~ 85	5 ~ 90	5 ~ 60
Elevation difference (in / out)	Max	m	—	30	30	30	30	30	30	30	30	30
Ambient temperature of outdoor unit	Cool Min ~ Max	°C	—	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-20 ~ +48	-20 ~ +48	-20 ~ +48	-20 ~ +48	-20 ~ +48
	Heat Min ~ Max	°C	—	-20 ~ +24	-20 ~ +24	-20 ~ +24	-20 ~ +24	-20 ~ +24	-20 ~ +24	-20 ~ +24	-20 ~ +24	-20 ~ +24
With PACi NX Standard												
Cooling capacity		kW	2,5	3,6	5,0	6,0	7,1	10,0	12,5	14,0	—	—
Heating capacity		kW	3,2	4,0	5,0	6,0	7,1	10,0	12,5	14,0	—	—
Air flow	Min / Max	m³/h	360 / 570	540/870	630/990	780/1320	780/1320	900/2160	1140/2280	1200/2400	—	—
Pipe length range		m	3 ~ 15	3 ~ 15	3 ~ 20	3 ~ 40	3 ~ 40	5 ~ 50	5 ~ 50	5 ~ 50	—	—
Elevation difference (in / out)	Max	m	30	30	30	30	30	30	30	30	—	—
Ambient temperature of outdoor unit	Cool Min ~ Max	°C	-10 ~ +43	-10 ~ +43	-10 ~ +43	-10 ~ +43	-10 ~ +43	-10 ~ +43	-10 ~ +43	-10 ~ +43	—	—
	Heat Min ~ Max	°C	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24	—	—

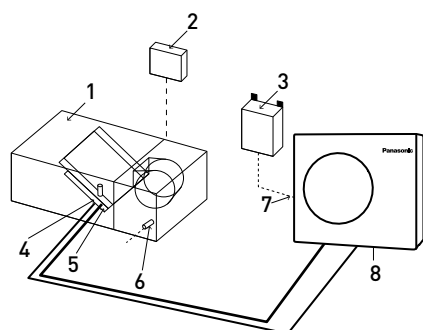

System and regulations. System overview.

- 1 | AHU equipment (field supplied)
- 2 | AHU system controller (field supplied)
- 3 | AHU connection kit controller box (with control PCB)
- 4 | Thermistor for gas pipe (E2)
- 5 | Thermistor for liquid pipe (E1)
- 6 | Thermistor for suction air
- 7 | Inter-unit wiring
- 8 | Outdoor unit

	Air flow volume m³/min																																					
Outdoor unit	360	510	540	570	630	720	780	870	900	960	990	1,080	1,170	1,200	1,320	1,450	1,500	1,600	1,740	1,800	1,900	2,000	2,160	2,280	2,300	2,400	2,520	2,610	2,640	2,800	2,970	3,000	3,480	3,600				
PACi NX Elite																																						
U-36PZH3E5																																						
U-50PZH3E5																																						
U-60PZH3E5																																						
U-71PZH4E5/8																																						
U-100PZH4E5/8																																						
U-125PZH4E5/8																																						
U-140PZH4E5/8																																						
PACi NX Standard																																						
U-25PZ3E5																																						
U-36PZ3E5																																						
U-50PZ3E5																																						
U-60PZ3E5																																						
U-71PZ3E5																																						
U100-PZ3E5/8																																						
U125-PZ3E5/8																																						
U140-PZ3E8																																						

Maximum allowed air volume flow under "Standard conditions".


Higher maximum allowed air volume flow under "Special conditions" ¹⁾: Maximum allowed air intake temperature at AHU DX coil heat exchanger in cooling mode is restricted to 30 °C DB.¹⁾ Using an AHU unit with a higher maximum allowed air volume flow is subject to a restriction of the "Air intake temperature" to 30 °C DB (instead of 32 °C WB under standard conditions).

New AHU connection kit MAH4M for ECOi 2-Pipe



System example with AHU connection kit MAH4M and Mini ECOi outdoor unit.

- AHU connection kit in an IP 65 casing, contains PCBs and terminal connections mounted inside
- Select the size of the expansion valve pack based on the capacity
- Direct Modbus communication with a built-in Modbus S-Link interface
- The heat exchanger, fan, and fan motor to be mounted in the AHU are field-supplied

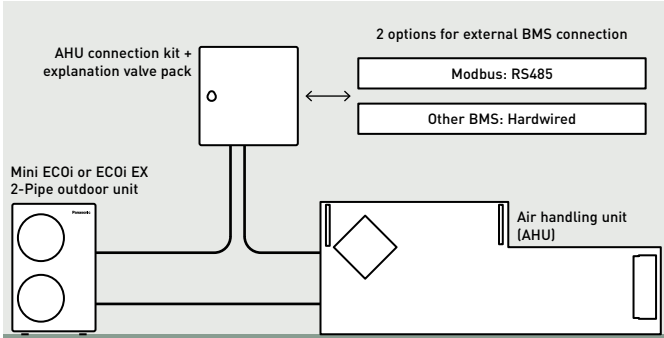

Demand control on the outdoor unit managed by external 0-10 V signal.

0-10 V control

With 0-10 V demand control, the outdoor unit capacity can be adjusted in each 5% demand step. Temperature set control (default discharge temperature control) is also available in each 0,5 K step.

Input voltage* [V]	0	1,0	1,5	2,0	2,5	3,0	3,5	4,0	4,5	5,0	5,5	6,0	6,5	7,0	7,5	8,0	8,5	9,0	9,5
Demand [% of nominal current]	No cut ¹⁾	40	45	50	55	60	65	70	75	80	85	90	95	100	105	110	115	120	No limit / Full capacity ²⁾
Indoor unit start / stop	Stop ¹⁾	Start																	

1) No cut / stop: AHU system / indoor unit is completely switched OFF.
2) No limit: No restrictions applied by BMS to AHU system / indoor unit performance (equivalent to "full-load operation" of AHU system / indoor unit).

Accessories highlights.

Remote control pack.
PAW-P+100PGNEPACK.
Graphic display remote control, managing both icons and international fonts.



EEV (Electric expansion valve) pack.
EEV controls refrigerant circuit superheat (or subcooling), directly managed by the c.pCO mini controller. Different sizes based on capacity.

EEV pack 1 ≤ 16 kW	PAW-P+116EEVPACK
EEV pack 2 ≤ 33 kW	PAW-P+133EEVPACK
EEV pack 3 ≤ 45 kW	PAW-P+145EEVPACK

* Example image.



NEW AHU connection kit MAH4M for ECOi 2-Pipe

Space-saving compact casing.

Direct Modbus communication without the need for an additional interface.

Accurate control with a pressure transducer.

New
2024



Built-in controller.



PAW-P+100MAH4M			6 HP	12 HP	16 HP
Cooling capacity	Nominal	kW	16,0	33,5	45,0
Heating capacity	Nominal	kW	17,0	37,5	50,0
Air flow	Min / Max	m³/h	1800/4400	2000/10000	3500/12000
Dimension	H x W x D	mm	300 x 400 x 150	300 x 400 x 150	300 x 400 x 150
Weight		kg	11	11	11
Pipe length range		m	10 ~ 100	10 ~ 100	10 ~ 100
Elevation difference (in / out)		m	10	10	10
Piping diameter ≤ 90 m	Liquid	Inch (mm)	3/8 (9,52)	1/2 (12,70)	1/2 (12,70)
	Gas	Inch (mm)	5/8 (15,88)	1 (25,40)	1 1/8 (28,57)
Piping diameter > 90 m ¹⁾	Liquid	Inch (mm)	—	5/8 (15,88)	5/8 (15,88)
	Gas	Inch (mm)	—	1 1/8 (28,57)	1 1/4 (31,75)

1) For R410A models only.

AHU connection kit / system combination					
Cooling capacity		Mini VRF		2-Pipe VRF	AHU connection kit
		Mini ECOi LZ2 Series (R32)	Mini ECOi LE2 Series (R410A)	ECOi EX ME2 Series	
6 HP	16,0 kW	U-5LZ2E5(8) U-6LZ2E5(8)	U-5LE2E5(8) U-6LE2E5(8)	—	PAW-P+100MAH4M
12 HP	33,5 kW	U-8LZ2E8 U-10LZ2E8	U-8LE1E8 U-10LE1E8	U-8ME2E8 U-10ME2E8 U-12ME2E8	PAW-P+100MAH4M
16 HP	45,0 kW	—	—	U-14ME2E8 U-16ME2E8	PAW-P+100MAH4M

Accessories	
PAW-P+102SENSPACK	AHU connection kit sensor pack 1 (2 pcs of SENSOR PT1000 HT IP67 -50/250 CABLE 6 m PCK)
PAW-P+116EEVPACK	EEV pack 1 (1 pc of expansion valve ≤ 16 kW (R410A / R32) and 1 pc of UNIPOLAR stator)
PAW-P+133EEVPACK	EEV pack 2 (1 pc of expansion valve ≤ 33 kW (R410A / R32) and 1 pc of UNIPOLAR stator)


Accessories	
PAW-P+145EEVPACK	EEV pack 3 (1 pc of expansion valve ≤ 45 kW (R410A / R32) and 1 pc of UNIPOLAR stator)
PAW-P+100PGNEPACK	Remote control pack (1 pc of PGNE 132 x 64 mm, mounting panel and 1 pc of cable L= 1,5 m, telephone connectors)

Technical focus

- Maximum capacity / system: 16 HP (45 kW*)
- Selectable expansion valve packs depending on the capacity
- DC 12 V outlet available without optional interface
- Maximum elevation difference indoor/outdoor unit: 10 m
- Elevation difference (indoor unit / indoor unit): 4 m
- In / out connection capacity ratio: 50~100%
- Maximum number of AHU connection kits: 1 unit
- Outdoor temperature range in heating: -20 ~ +15 °C
- Available temperature range for the suction air at AHU connection kit: cool: +18 ~ +32 °C / heat: +16 ~ +30 °C
- The system's set temperature can be selected either as the default setting discharge air temperature (supply room temperature) or the suction air set temperature (or room return air temperature)
- Accurate control with a pressure transducer
- Direct Modbus communication with a built-in Modbus S-Link interface
- Various technical parameters available with Modbus
- SG ready fulfilled. Demand input can be set Thermostat OFF or 40 – 200% by the user
- Defrost operation signal, compressor status ON / OFF output
- Display an error message concerning drain water overflow


- Connectable with S-Link system. Special care for electrical noise may be necessary depending on the on-site system
- Fan control signal output to manage the air flow (ON / OFF)
- Alarm status monitoring output

* Nominal cooling capacity.

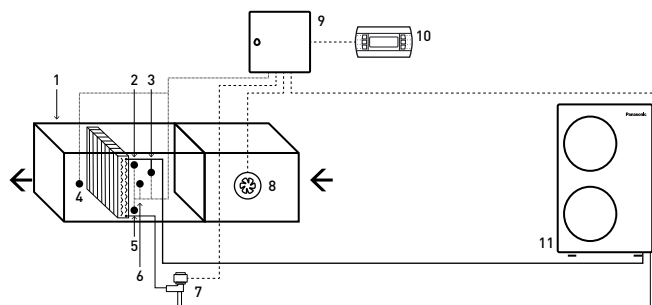**System and regulations. System overview.**

- 1 | AHU Unit equipment (field supplied)
- 2 | Thermistor for gas pipe (E3)
- 3 | Pressure transducer
- 4 | Thermistor for discharge air (BL)
- 5 | Thermistor for liquid pipe (E1)
- 6 | Thermistor for suction air (TA)
- 7 | Expansion valve (accessorie part)
- 8 | Fan (field supplied)
- 9 | AHU connection kit controller box
- 10 | Optional remote controller
- 11 | Outdoor unit Mini ECOi and 2-Pipe ECOi EX

AHU connection kit MAH3M for ECOi and ECO G

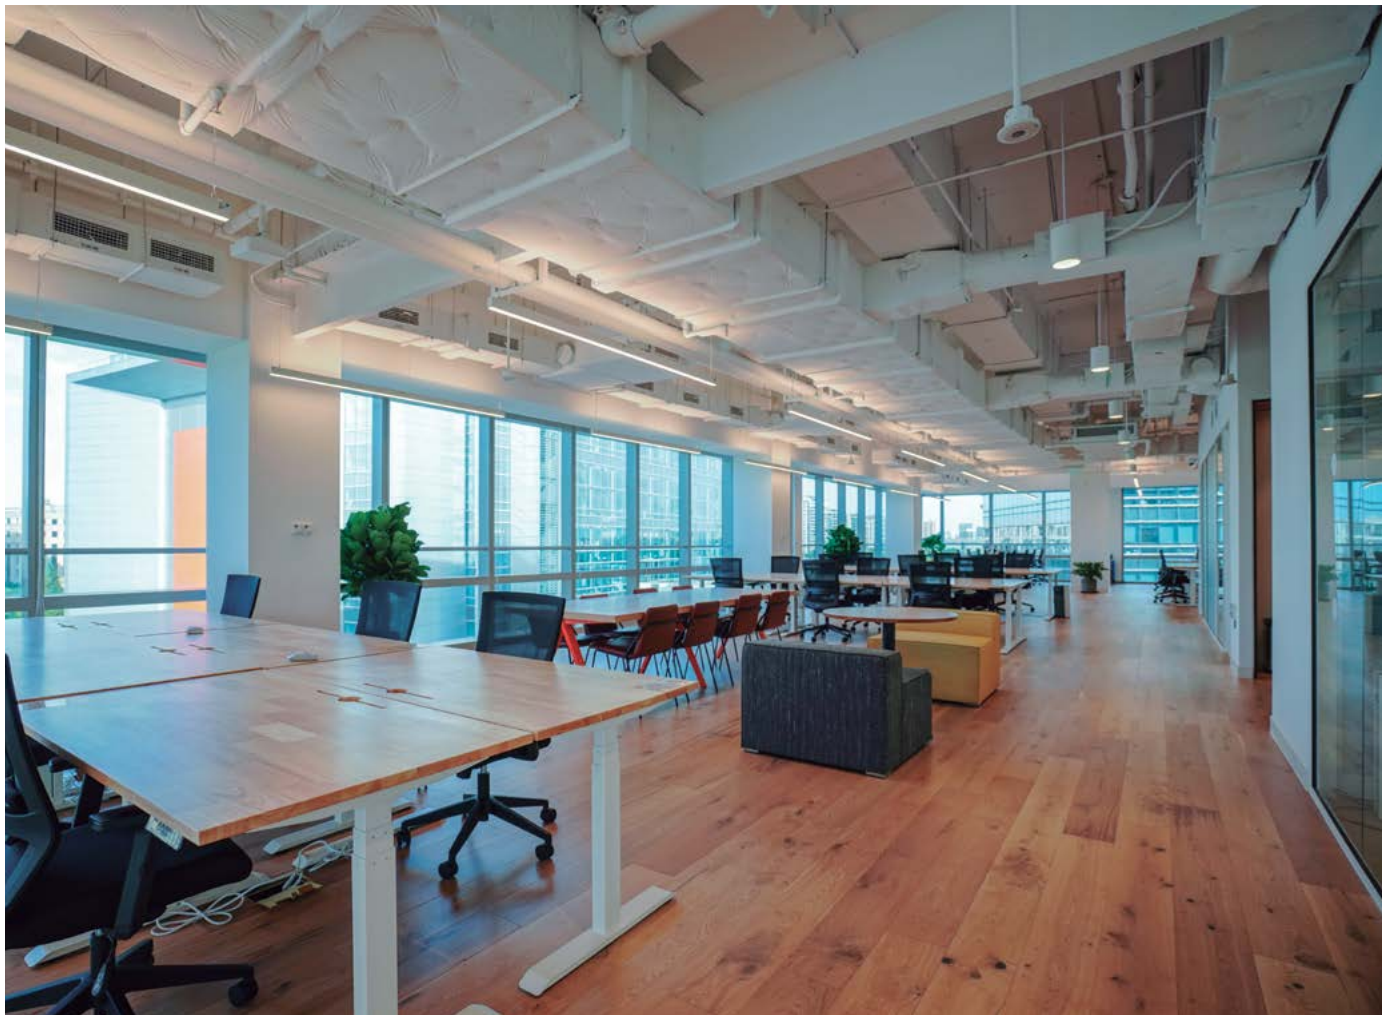


With ECOi outdoor units

ECOi outdoor units shall be used for AHU connection kit. 3 models for VRF system: 5 HP (PAW-160MAH3M), 10 HP (PAW-280MAH3M) and 20 HP (PAW-560MAH3M).

With ECO G outdoor units

- One AHU connection kit may be used for one ECO G unit.
- Multiple AHU connection kits cannot be used
- Mixed with standard indoor units is not allowed
- Power specifications are single phase 220 V to 240 V

System example for large capacity (more than 56.0 kW).
3 x [PCB, transformer, solenoid control valve, thermistor x 4 pcs, terminal base and electrical component box].
Example 140 kW system.

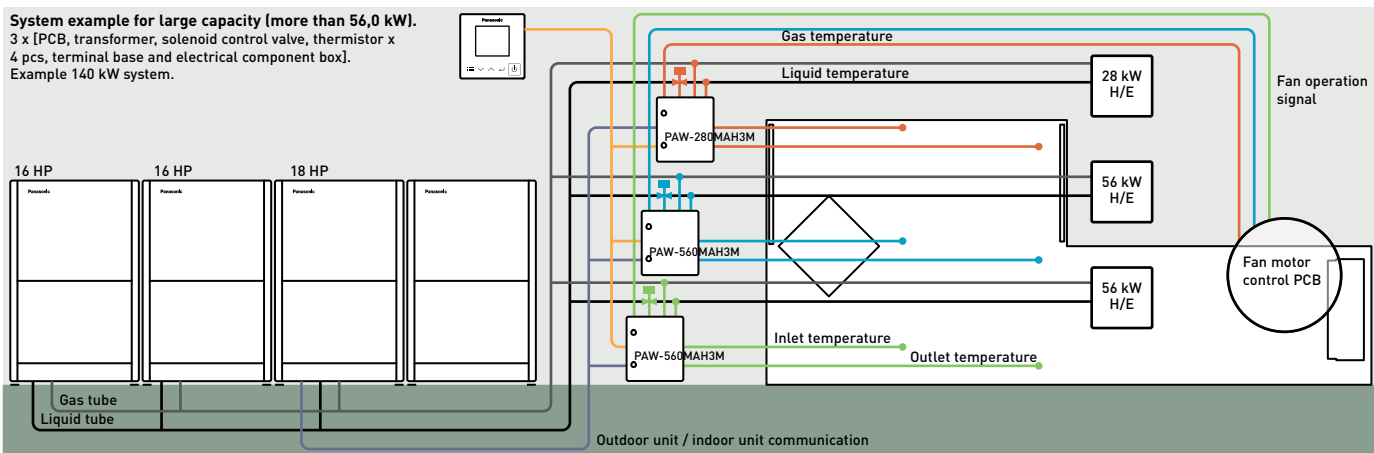

AHU connection kit MAH3M for ECOi and ECO G

CONEX



CONEX Bluetooth®
control built-in.
CZ-RTC6BL



ECO EX

ECO i

ECO G

			5 HP	10 HP	20 HP	30 HP	40 HP	50 HP	60 HP	70 HP	80 HP
Reference	PAW-	160MAH3M	280MAH3M	560MAH3M	280MAH3M	560MAH3M	560MAH3M	560MAH3M	560MAH3M	560MAH3M	560MAH3M
Cooling capacity	kW	14,0	28,0	56,0	84,0	112,0	140,0	168,0	196,0	224,0	
Heating capacity	kW	16,0	31,5	63,0	95,0	127,0	155,0	189,0	219,0	252,0	
Air flow	Cool Min/Max	m³/h	2598/1140	4998/3498	10002/7002	15000/10500	19998/13998	24996/17496	30000/21000	24000/35000	28000/40000
Bypass factor recommended		0,9	0,9	0,9	0,9	0,9	0,9	0,9	0,9	0,9	0,9
Dimension	HxWxD	mm	500x400 x150	500x400 x150	500x400 x150	500x400 x150	500x400 x150	500x400 x150	500x400 x150	500x400 x150	500x400 x150
Net weight	kg	11,5	11,5	11,5	11,5	11,5	11,5	11,5	11,5	11,5	11,5
Pipe length range	m	10 ~ 100	10 ~ 100	10 ~ 100	10 ~ 100	10 ~ 100	10 ~ 100	10 ~ 100	10 ~ 100	10 ~ 100	10 ~ 100
Elevation difference (in / out)	Max	m	10	10	10	10	10	10	10	10	10
Piping diameter	Liquid	Inch (mm)	3/8(9,52)	3/8(9,52)	5/8(15,88)	3/4(19,05)	3/4(19,05)	3/4(19,05)	3/4(19,05)	7/8(22,22)	7/8(22,22)
	Gas	Inch (mm)	5/8(15,88)	7/8(22,22)	1 1/8(28,58)	1 1/4(31,75)	1 1/2(38,15)	1 1/2(38,15)	1 1/2(38,15)	1 5/8(41,28)	1 3/4(44,45)
Intake temperature of AHU connection kit	Cool Min ~ Max	°C DB	+18 ~ +32	+18 ~ +32	+18 ~ +32	+18 ~ +32	+18 ~ +32	+18 ~ +32	+18 ~ +32	+18 ~ +32	+18 ~ +32
	Cool Min ~ Max	°C WB	+13 ~ +23	+13 ~ +23	+13 ~ +23	+13 ~ +23	+13 ~ +23	+13 ~ +23	+13 ~ +23	+13 ~ +23	+13 ~ +23
	Heat Min ~ Max	°C	+16 ~ +30	+16 ~ +30	+16 ~ +30	+16 ~ +30	+16 ~ +30	+16 ~ +30	+16 ~ +30	+16 ~ +30	+16 ~ +30
Ambient temperature of outdoor unit	Cool Min ~ Max	°C	-10 ~ +43	-10 ~ +43	-10 ~ +43	-10 ~ +43	-10 ~ +43	-10 ~ +43	-10 ~ +43	-10 ~ +43	-10 ~ +43
	Heat Min ~ Max	°C	-20 ~ +15	-20 ~ +15	-20 ~ +15	-20 ~ +15	-20 ~ +15	-20 ~ +15	-20 ~ +15	-20 ~ +15	-20 ~ +15

AHU connection kit / system combination


Capacity	ECOi Series	AHU kit				Capacity	ECO G Series	AHU kit	
5 HP 16 kW	All ECOi	160MAH3M	—	—	—	5 HP 16 kW	All ECO G	160MAH3M	
10 HP 28 kW	U-10ME2E8	—	—	—	—	10 HP 28 kW	All ECO G	280MAH3M	
20 HP 56 kW	U-20ME2E8	—	—	—	—	20 HP 56 kW	U-20GE3E5	560MAH3M	
30 HP 84 kW	U-16ME2E8	U-14ME2E8	—	—	—				
40 HP 112 kW	U-20ME2E8	U-20ME2E8	—	—	—				
50 HP 140 kW	U-18ME2E8	U-16ME2E8	U-16ME2E8	—	—				
60 HP 168 kW	U-20ME2E8	U-20ME2E8	U-20ME2E8	—	—				
70 HP 196 kW	U-20ME2E8	U-20ME2E8	U-20ME2E8	—	—				
80 HP 224 kW	U-20ME2E8	U-20ME2E8	U-20ME2E8	—	—				

Technical focus

- Maximum capacity / system: 80 HP (224 kW)
- Maximum piping length: 100 m (120 m equivalent)
- Elevation difference (indoor unit / indoor unit): 4 m
- In / out capacity ratio: 50~100%
- Maximum number of AHU connection kits: 4 units*
- Outdoor temperature range in heating: -20 ~ +15 °C
- Available temperature range for the suction air at AHU connection kit: cool: +18 ~ +32 °C / heat: +16 ~ +30 °C
- The systems is controlled by the suction air (or room return air) temperature (same as standard indoor unit)
- The discharge air temperature is also controlled to prevent too-low air discharge in cooling or too-high air discharge in heating (in case of VRF)
- Demand control (forcible thermostat-OFF control by operating current)
- Defrost operation signal, Thermo-ON / OFF states output
- Drain pump control (drain pump and the float switch to be supplied in local)
- External target temperature setting via indoor / outdoor signal interface is available with CZ-CAPBC2 (Ex. 0-10 V)
- Demand control 40% to 120% (5% steps) by 0-10 V input signal
- Connectable with S-Link system. Special care for electrical noise may be necessary depending on the on-site system

- Fan control signal from the PCB can be used to control the air flow (high / mid / low and LL for Th-OFF). Need to change the fan control circuit wiring at field

* To be simultaneous operation controlled by one remote controller sensor.

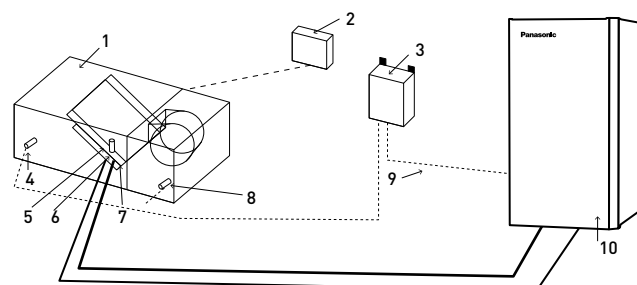

System and regulations. System overview.

- AHU Unit equipment (field supplied)
- AHU Unit system controller (field supplied)
- AHU connection kit controller box (with control PCB)
- Thermistor for discharge air
- Electronic expansion valve
- Thermistor for gas pipe (E3)
- Thermistor for liquid pipe (E1)
- Thermistor for suction air
- Inter-unit wiring
- ECOi or ECOi G outdoor unit

Optional controller.

Timer remote controller.
CZ-RTC5B.



Energy recovery ventilation

Indoor air quality (IAQ) is a key consideration for any business owner looking to create a healthy and comfortable environment. An energy recovery ventilator (ERV) provides balanced, energy-efficient ventilation by transferring heat and moisture between incoming fresh filtered air and outgoing stale air. In the winter, an ERV keeps heat and moisture inside the building. During hot, humid summer months, it maintains cool, dry indoor air.



Advanced ERV ZY Series.

- Extended 9 model line-up including 2000 m³/h model
- DC motors
- ESP up to 150 Pa
- F7 grade filter built-in as a standard
- New intuitive remote controller
- BMS integration with RS485



ERV ZDY Series.

- Simple 5 line-up
- AC motor
- A nonwoven cloth filter
- Simple wired remote controller with black panel




Advanced energy recovery ventilation - ZY Series




Recovers up to 83% of the heat in the outgoing air

ZY Series achieves more than 80% of heat exchange efficiency in all the line-up ¹⁾. The high recovery rate optimizes operation cost and can be considered as a sustainable solution.

1) Heating operation, H1 speed setting.

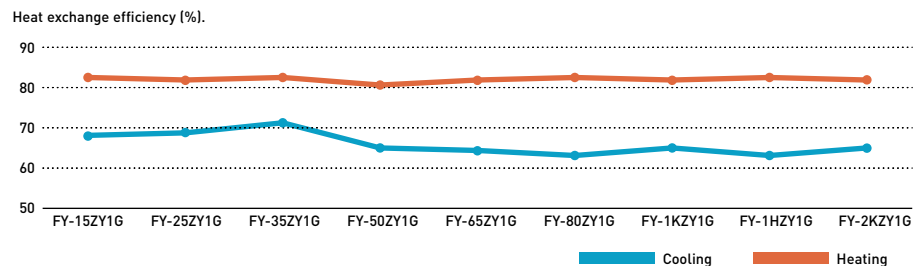

Ventilation volume setting PQ curve example.

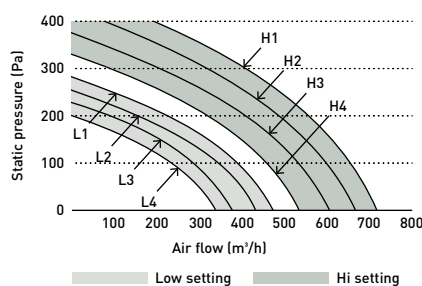


Easy adjust for air volume balance

DC motors are equipped with independent control settings for air supply and exhaust. Air volume balance can be easily adjusted with 4 speeds settings for each Hi / Low operation.

Highly efficient filter for better air supply

An effective EN F7 grade filter is built-in as a standard.

Expected cleaning maintenance cycle is once per month, with an average of 4-6 months for replacement in high demand environments.

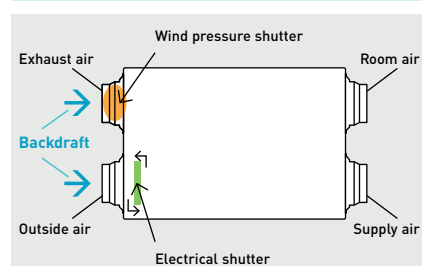

Backdraft shutters equipped as standard

A backdraft shutter prevents air flowing in the wrong direction when the ERV system is not in operation.

The shutter at OA (outside air intake) side is inter-locked with ON / OFF switch. The shutter at EA (exhaust air outlet) side opens with the pressure generated by air stream then closes automatically.

Intuitive remote controller with RS485 connection

- Simple and clean screen with white back light panel
- RS485 terminal equipped to integrate with Building Management Systems
- Metal switch box is included in the package




Energy recovery ventilation - ZDY Series



Energy efficiency and ecology


Energy consumption is dramatically reduced by using a counter-flow heat-exchange element. Air conditioning load is reduced by approximately 20%, resulting in significant energy savings.

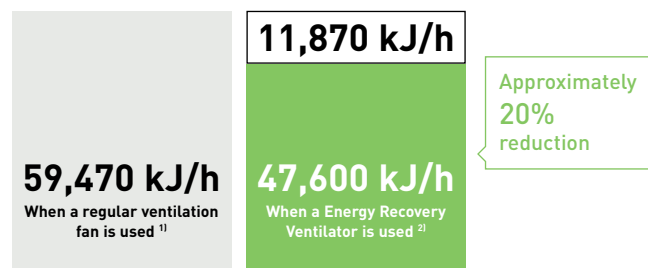

1) Two FY-27FPK7 units. 2) One FY-500ZDY8R unit.

Comparison of former and current elements

With the counter-flow element, air flows through the element for a longer time (longer distance) than the former cross-flow element, so the heat-exchange effect remains unchanged even if the element is made thinner.

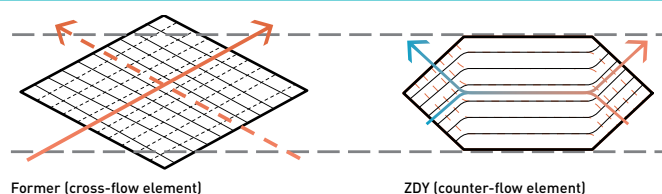

More comfort

Quiet operation.

Low noise operation results in noticeably quieter units. All models with capacities below 500 m³/h run at noise levels below 32 dB (high setting) and even our largest 1000 m³/h-capacity model runs at only 37,5 dB (high setting).


Long service life of heat-exchange element

A nonwoven cloth filter has a high dust collection efficiency and redesigned the air flow passages to achieve a durable heat-exchange element. Cleaning can be reduced to every 6 months.

Reverse mountable direct air supply / exhaust system

Adoption of straight air supply / exhaust system: Duct design is simplified because the air supply / exhaust ducts are straight.

Since each unit can be mounted in reverse position, only one inspection hole is needed for two units: Two units can share one inspection hole so duct work is easier and more flexible.

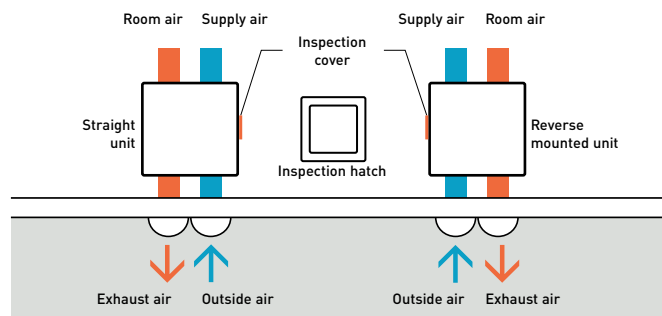

A intuitive and stylish control

- Wire controller included as standard
- Compact and flat front panel
- Filter cleaning support
 - Signal alert for clearing
 - Filter usage condition by 1/2/3/4 months
- Size (W x H x D) 116 x 120 x 40 mm



Advanced energy recovery ventilation - ZY Series



Rated flow rate			150 m³/h	250 m³/h	350 m³/h	500 m³/h	650 m³/h	800 m³/h	1000 m³/h	1500 m³/h	2000 m³/h
Indoor unit			FV-15ZY1G	FV-25ZY1G	FV-35ZY1G	FV-50ZY1G	FV-65ZY1G	FV-80ZY1G	FV-1KZY1G	FV-1HZY1G	FV-2KZY1G
Power supply	Voltage	V	220 - 240	220 - 240	220 - 240	220 - 240	220 - 240	220 - 240	220 - 240	220 - 240	220 - 240
	Phase		Single phase	Single phase	Single phase	Single phase	Single phase	Single phase	Single phase	Single phase	Single phase
	Frequency	Hz	50	50	50	50	50	50	50	50	50
Motor type			DC	DC	DC	DC	DC	DC	DC	DC	DC
ERV											
Air flow	Max	m³/h	150	250	350	500	650	800	1000	1500	2000
External static pressure	Max	Pa	100	120	140	130	150	150	150	130	130
Sound power ²⁾	Max	dB(A)	37	38	39	43	45	45	46	49	51
Input power	Max	W	76 - 84	106 - 117	141 - 155,5	180 - 198	420 - 462	470 - 517	550 - 605	940 - 1034	1100 - 1210
Heat exchange efficiency ³⁾											
Cooling	Max	%	68,0	69,0	71,0	65,0	64,0	63,0	65,0	63,0	65,0
Heating	Max	%	83,0	82,0	83,0	81,0	82,0	83,0	82,0	83,0	82,0
Enthalpy exchange efficiency											
Cooling	Max	%	66,0	66,0	67,0	62,5	62,5	63,5	63,0	63,5	63,0
Heating	Max	%	76,0	74,0	75,0	73,0	72,0	73,0	74,0	73,0	74,0
Adapter diameter		mm	100	150	150	200	200	250	250	250	250
Dimension	H x W x D	mm	289 x 610 x 860	289 x 735 x 860	331 x 874 x 968	331 x 1016 x 968	404 x 954 x 1008	404 x 1004 x 1224	404 x 1231 x 1224	808 x 1004 x 1224	808 x 1231 x 1224
Net weight		kg	23	27	37	40	48	60	64	119	142

1) Different dimensions depending on models. 2) Measurement of noise 1,5 m below the center of the main unit (anechoic chamber). 3) Heat exchange efficiency measurement standard JIS B 8628 (2003).
 * JIS B 8628 (2017) is used in the measurement environment. * A remote controller is included.

Accessories

FV-FP15ZY1G	Replacement high efficiency filter for FV-15ZY1G
FV-FP25ZY1G	Replacement high efficiency filter for FV-25ZY1G
FV-FP35ZY1G	Replacement high efficiency filter for FV-35ZY1G
FV-FP50ZY1G	Replacement high efficiency filter for FV-50ZY1G

Accessories

FV-FP65ZY1G	Replacement high efficiency filter for FV-65ZY1G
FV-FP80ZY1G	Replacement high efficiency filter for FV-80ZY1G and FV-1HZY1G*
FV-FP1KZY1G	Replacement high efficiency filter for FV-1KZY1G and FV-2KZY1G*

* 2 sets of filters required for those models.

Energy recovery ventilation - ZDY Series

FY-250ZDY8R



FY-350ZDY8R



FY-500ZDY8R



FY-800ZDY8R



FY-01KZDY8R



Rated flow rate			250 m³/h			350 m³/h			500 m³/h			800 m³/h			1000 m³/h		
Indoor unit			FY-250ZDY8R			FY-350ZDY8R			FY-500ZDY8R			FY-800ZDY8R			FY-01KZDY8R		
Power supply	Voltage	V	220 - 240			220 - 240			220 - 240			220 - 240			220 - 240		
	Phase		Single phase			Single phase			Single phase			Single phase			Single phase		
	Frequency	Hz	50			50			50			50			50		
Notch			Extra high	High	Low	Extra high	High	Low	Extra high	High	Low	Extra high	High	Low	Extra high	High	Low
Input power		W	112,0 - 128,0	108,0 - 123,0	87,0 - 96,0	182,0 - 190,0	178,0 - 185,0	175,0 - 168,0	263,0 - 289,0	204,0 - 225,0	165,0 - 185,0	387,0 - 418,0	360,0 - 378,0	293,0 - 295,0	437,0 - 464,0	416,0 - 432,0	301,0 - 311,0
Air flow		m³/h	250	250	190	350	350	240	500	500	440	800	800	630	1000	1000	700
External static pressure		Pa	105	95	45	140	60	45	120	60	35	140	110	55	105	80	75
Sound power	Heat exchange	dB(A)	30,0 - 31,5	29,5 - 30,5	23,5 - 26,5	32,5 - 33,0	30,5 - 31,0	22,5 - 25,5	36,5 - 37,5	34,5 - 35,5	31,0 - 32,5	37,0 - 37,5	36,5 - 37,0	33,5 - 34,5	37,5 - 38,5	37,0 - 37,5	33,5 - 34,5
	Normal	dB(A)	30,0 - 31,5	29,5 - 30,5	23,5 - 26,5	32,5 - 33,0	30,5 - 31,0	22,5 - 25,5	37,5 - 38,5	37,0 - 38,0	31,0 - 32,5	37,0 - 37,5	36,5 - 37,0	33,5 - 34,5	39,5 - 40,5	39,0 - 39,5	35,5 - 36,5
Temperature exchange efficiency		%	75	75	77	75	75	78	75	75	76	75	75	76	75	75	79
Dimension	H x W x D	mm	270 x 599 x 882			317 x 804 x 1050			317 x 904 x 1090			388 x 884 x 1322			388 x 1134 x 1322		
Net weight		kg	29			49			57			71			83		

The noise level was measured within an acoustic chamber. Due to installation arrangement and surfaces within the space, actual noise levels may increase. The input, the current and the exchange efficiency are values relevant to the indicated air flows. The noise level is measured 1,5 m below the centre of the unit. The temperature exchange efficiency is an average of both cooling and heating operation.

New energy recovery ventilation with DX coil - HRPT Series for VRF


The HPRT Series is specifically designed for commercial applications or collective residential buildings, offering highly efficient heat recovery of up to 86,6%. It's an ideal solution to achieve the highest energy certification for buildings in the tertiary, industrial and collective residential sectors including centralized condominium systems.



Highly efficient and flexible

The HRPT Series is a dual-flow ventilation with an EC fan, ensuring high-efficiency heat recovery ($>85\% \eta$). The series includes five models with air flow rates from 500 to 2450 m³/h. Two types of polypropylene heat exchangers (high efficiency and sensible) are provided to meet a range of requirements.


HRPT Series line-up

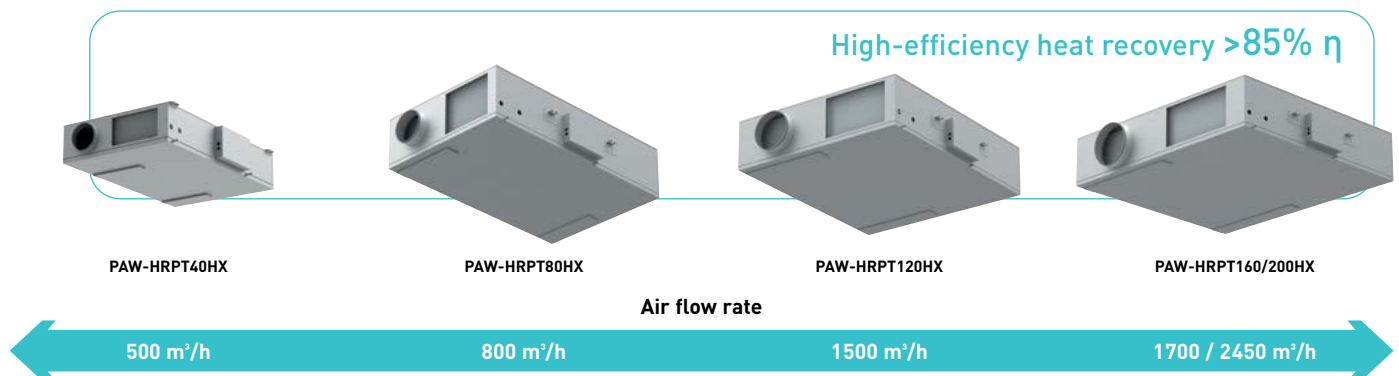

Quality meets efficiency. Explore the HPRT Series

Reverse blade radial fans with low-consumption and low-noise electronic motor

Highly efficient polypropylene heat exchanger with counter-current flows and integrated bypass as standard

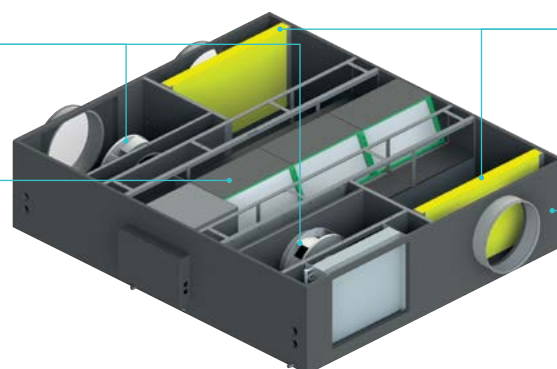

Two filters with low pressure drop: F7 (ePM1) on the fresh air and M5 (ePM10) on the ambient air

Structure with high thermal insulation

* Model shown: HRPT120.

NEW energy recovery ventilation with DX coil - HRPT Series - R32 / R410A

- Dual flow ventilation with EC fan, featuring high efficiency heat recovery (>85% η)
- 2 types of polypropylene heat exchanger (high efficiency and sensible) with counter-current flows and integrated bypass as standard
- Modbus connection available

New
2024



+ COMPATIBLE WITH ALL PANASONIC CONNECTIVITY SOLUTIONS. FOR DETAILED INFORMATION GO TO THE CONTROL SYSTEMS SECTION

Indoor unit with high-efficiency heat exchanger			PAW-HRPT40HX		PAW-HRPT80HX		PAW-HRPT120HX		PAW-HRPT160HX		PAW-HRPT200HX	
Power supply	Voltage	V	230		230		230		230		380	
	Phase		Single phase		Single phase		Single phase		Single phase		Three phase	
	Frequency	Hz	50		50		50		50		50	
Heat recovery ventilation ¹⁾			Cooling		Heating		Cooling		Heating		Cooling	
Temperature efficiency	%		60,9	49,5	59,2	47,6	60,3	48,8	61,0	49,6	59,2	47,6
Enthalpy efficiency	%		75,7	51,6	73,1	48,9	73,6	50,7	74,3	50,8	73	48,8
Weight	kg		70		120		135		150		180	

Indoor unit with sensible heat exchanger			PAW-HRPT40		PAW-HRPT80		PAW-HRPT120		PAW-HRPT160		PAW-HRPT200	
Power supply	Voltage	V	230		230		230		230		380	
	Phase		Single phase		Single phase		Single phase		Single phase		Three phase	
	Frequency	Hz	50		50		50		50		50	
Heat recovery ventilation ¹⁾			Cooling		Heating		Cooling		Heating		Cooling	
Temperature efficiency	%		86,1	86,6	84,3	84,7	82,9	83,5	83,9	84,2	81,3	82,0
Weight	kg		67		117		132		147		177	

Common data			Cooling		Heating		Cooling		Heating		Cooling	
DX coil			Cooling		Heating		Cooling		Heating		Cooling	
Total / Sensible capacity	kW		2,5	3,0	5,0	6,0	7,0	8,1	10,0	12,5	12,5	14,0
Maximum input current	A		1,5		2,2		4,1		4,4		3,3	
Sound pressure @1 m / @3 m	dB(A)		41 / 35		51 / 43		42 / 36		49 / 41		57 / 49	
Air flow	High	m³/h	500		800		1500		1700		2450	
External static pressure	High	Pa	150		150		150		150		150	
Dimension	H x W x D	mm	283 x 975 x 1400		408 x 1180 x 1720		408 x 1580 x 1720		408 x 1980 x 1720		408 x 1980 x 1720	
Piping diameter	Liquid	Inch (mm)	1/4 (6,35)		3/8 (9,52)		3/8 (9,52)		3/8 (9,52)		3/8 (9,52)	
	Gas	Inch (mm)	1/2 (12,70)		5/8 (15,88)		5/8 (15,88)		5/8 (15,88)		5/8 (15,88)	

1) Data refers to the following conditions (UNI EN 13141-7): nominal air flow, external air 5 °C with 72% r. / expelled air 25 °C with 28% r. * Image is for PAW-HRPT40.


Accessories	
CZ-RTC6W	CONEX wired remote controller (non-wireless), white
CZ-RTC6WBL	CONEX wired remote controller with Bluetooth®, white
CZ-RTC6	CONEX wired remote controller (non-wireless), black
CZ-RTC6BL	CONEX wired remote controller with Bluetooth®, black
CZ-RTC5B	Wired remote controller with Econavi function

Accessories	
PAW-RE2C4-MOD-WH	Room controller for hotel rooms, white
PAW-RE2C4-MOD-BK	Room controller for hotel rooms, black
PAW-RE2D4-WH	Display control for hotel rooms, white
PAW-RE2D4-BK	Display control for hotel rooms, black

Technical focus


- Dual flow ventilation with EC fan, featuring high efficiency heat recovery (>85% η)
- 5 model line-up is available with air flow rates of 500, 800, 1200, 1600 and 2000 m³/h
- 2 types of polypropylene heat exchanger (high efficiency and sensible) with counter-current flows and integrated bypass as standard
- Automatic defrosting of the exchanger
- Low consumption and EC motors with electronic speed control ensure high useful static pressure for circular inlet connection to air ducts
- Wide ambient temperature range up to +50 °C and down to -15 °C
- Modbus connection available

Interconnection to outdoor / indoor units

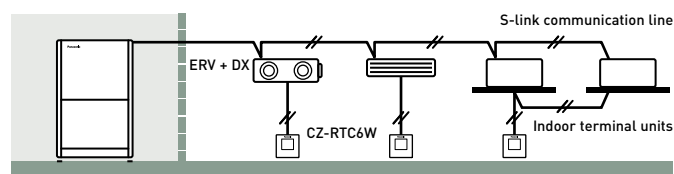

Aeraulic performance

EC motors with electronic speed control ensure high values of effective static pressure for ducting.

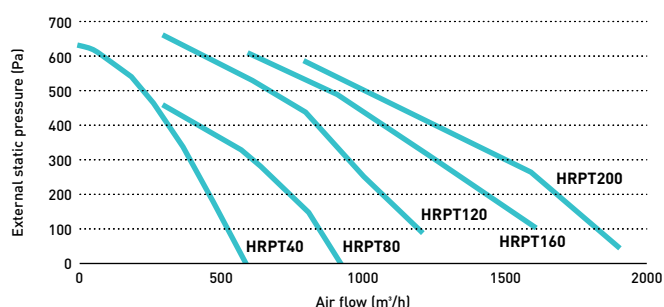

Heat recovery with DX coil - ZDX Series for VRF

Panasonic heat recovery solution for greater energy efficiency.

Performing well in extreme weather conditions, it can achieve up to 77% efficiency (63% in enthalpy efficiency).



The counter-flow heat exchanger reduces the air conditioning load, enabling customers – typically owners of hotels, restaurants and other large commercial buildings – to reduce their energy consumption and save on the cost of maintaining comfortable room temperatures.

Energy efficiency

These heat recovery devices are an example of Panasonic's continued commitment to developing unbeatable, energy-efficient air conditioning technologies for commercial applications.


The unit features a DX coil, and is designed to recover up to 77% of the heat from outgoing air, and an air purifying system which helps to improve air quality. In even the most demanding commercial applications, business owners will benefit from the unit's ability to by-pass the heat exchange process when the outside air temperature is cool enough for fresh air to be drawn directly inside (free cooling). This alleviates the load on the air conditioning equipment and consequently reduces energy bills.

Supply section complete


The supply section comes complete with the DX coil (using R410A refrigerant) – fitted with a solenoid control valve, freon filter, contact temperature sensors on the liquid and gas line, and NTC sensors on the upstream and downstream air flows. The built-in electric box is equipped with a PCB to control the internal fan speed and to interconnect the outdoor and indoor units, and the ducts are connected by circular plastic collars.

Characteristic curves

The following curves show the unit external static pressure at maximum fan speed for each model.

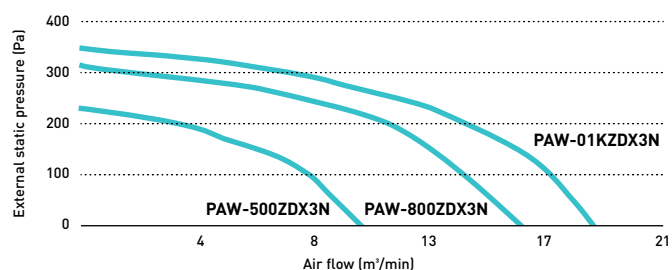

Balanced ventilation

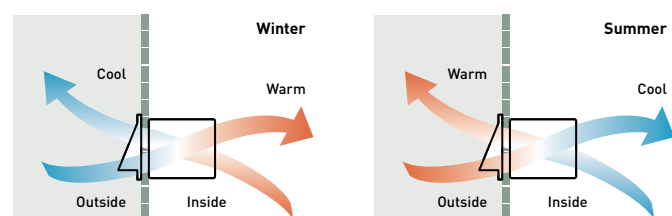

Heat recovery with DX coil - ZDX Series · R410A

Motorised heat recovery by-pass device automatically controlled to use fresh air free-cooling when convenient.



+ COMPATIBLE WITH ALL PANASONIC CONNECTIVITY SOLUTIONS. FOR DETAILED INFORMATION GO TO THE CONTROL SYSTEMS SECTION

Indoor unit			PAW-500ZDX3N		PAW-800ZDX3N		PAW-01KZDX3N	
Power supply	Voltage	V	230		230		230	
	Phase		Single phase		Single phase		Single phase	
	Frequency	Hz	50		50		50	
Air flow		m ³ /min	8,3		13,3		16,7	
External static pressure ¹⁾		Pa	90		120		115	
Maximum current		A	0,6		1,4		2,1	
Input power		W	150		320		390	
Sound pressure ²⁾		dB(A)	39		42		43	
Piping diameter	Liquid	Inch (mm)	1/4 (6,35)		1/4 (6,35)		1/4 (6,35)	
	Gas	Inch (mm)	1/2 (12,70)		1/2 (12,70)		1/2 (12,70)	
Heat recovery			Cooling		Heating		Cooling	
Temperature efficiency			76		76		76	
Enthalpy efficiency			63		67		60	
Saved power summer mode or winter mode*			1,70		4,30 (4,80)		3,20	
DX coil			Cooling		Heating		Cooling	
Total / Sensible capacity			3,00/2,10		5,10/3,50		5,80/4,10	
OFF temperature			15,9		15,5		16,2	
OFF relative humidity			90		90		89	

Nominal summer conditions: Outside air: 32 °C DB, RH 50%. Ambient air: 26 °C DB, RH 50%. Nominal winter conditions: Outside air: -5 °C DB, RH 80%. Ambient air: 20 °C DB, RH 50%. Cooling mode air inlet condition: 28,5 °C DB, RH 50%; evaporating temperature 7 °C. Heating mode air inlet condition: 13 °C DB, RH 40% (11 °C DB, RH 45%); condensating temperature 40 °C. DB: Dry Bulb; RH: Relative Humidity. 1) Referred to the nominal air flow after filter and plate heat exchanger. 2) Sound pressure level calculated at 1 m far from: ducted supply exhaust air ducted return - first air intake / service side, at normal condition. * Tentative data.

Accessories

CZ-RTC6W	CONEX wired remote controller (non-wireless), white
CZ-RTC6WBL	CONEX wired remote controller with Bluetooth®, white
CZ-RTC6	CONEX wired remote controller (non-wireless), black
CZ-RTC6BL	CONEX wired remote controller with Bluetooth®, black
CZ-RTC5B	Wired remote controller with Econavi function

Accessories


PAW-RE2C4-MOD-WH	Room controller for hotel rooms, white
PAW-RE2C4-MOD-BK	Room controller for hotel rooms, black
PAW-RE2D4-WH	Display control for hotel rooms, white
PAW-RE2D4-BK	Display control for hotel rooms, black

Technical focus

- Galvanized steel self-supporting panels, internally and externally insulated
- High efficiency static cross-flow heat recovery, made by membrane with high moisture permeability, good air tightness, excellent tear, and aging resistance, structure consisting of flat and corrugated plates. Total heat exchange with temperature efficiency up to 76% and enthalpy efficiency up to 67%, also at high level during summer season
- ISO16890 ePm2,5 95% (F9 EN 779) efficiency class filter with synthetic cleanable media and COARSE 50% (G3 EN 779) pre-filter ON fresh air, COARSE 50% filter on return air intake
- Removable side panel to access filters and heat recovery in the event of scheduled maintenance
- Low consumption, low noise, high efficiency direct driven fans

- Supply section complete with DX coil (R410A) fitted with solenoid control valve, freon filter, contact temperature sensors on liquid and gas line, NTC sensors upstream and downstream of air flow
- Built-in electric box equipped with PCB to control internal fan speed and to interconnect outdoor / indoor units
- Duct connection by circular plastic collars

Interconnection to outdoor / indoor units

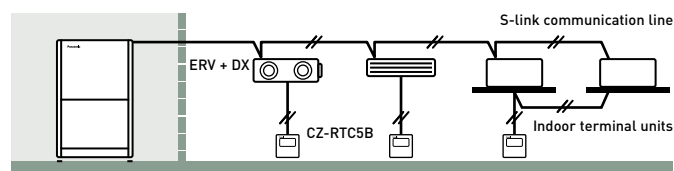

INTERNET CONTROL: Optional.

Electric air curtains

The Panasonic range of air curtains is designed for smooth operation and efficient performance. Air curtains produce a continuous stream of air blown from the top to the bottom of an open doorway and create a barrier that people and products can flow across, but air cannot.




Electric air curtain

1 Designed to maximize performance
High air flow upgraded 145% compared to conventional model (in the case of FY-3009U1).

3 Easier installation and maintenance
Simple structure for easy installation and maintenance.

2 Comprehensive product line up
1,5 m wide model added in the line up.

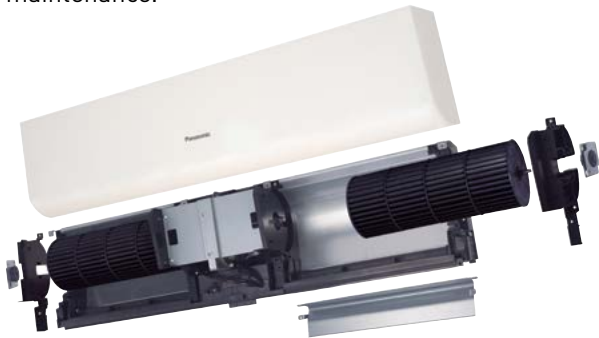

			FY-3009U1	FY-3012U1	FY-3015U1
Width		mm	900	1200	1500
Voltage		V	220	220	220
Air flow	Hi / Lo	m³/h	1100/920	1400/1270	2000/1800
Consumption	Hi / Lo	W	76/70	94/85	131/110
Current	Hi / Lo	A	0,35/0,32	0,43/0,40	0,59/0,50
Air speed	Hi / Lo	m/s	10,50/8,50	9,50/8,00	10,50/9,50
Sound pressure	Hi / Lo	dB(A)	48,5/45,0	48,5/44,5	51,5/48,0
Dimension	HxWxD	mm	900x231,5x212	1200x231,5x212	1500x231,5x212
Net weight		kg	12,0	14,5	18,0

Electric air curtain with DX coil

Designed to improve energy efficiency, minimise heat loss from a building, and allow retailers to keep doors open to encourage customers, our air curtains are suitable for connection to both PACi and VRF Systems.



FRICO


Highly efficient heating effect

The combined air stream, which has a desirable low air current induction factor (mixing factor), can carry the selected initial temperature effect over long distances, and will reach the floor area while still at room temperature. This is necessary to avoid cooling down the interior spaces.

Available in different lengths to suit requirements between 1 and 2,5 m, both air curtains have outlet grilles that can be adjusted to five different positions. The HS model can be installed up to a height of 3,0 m with the LS model up to 2,7 m. The outlet grilles can be easily adjusted into five positions to suit different installation requirements and the air filter can be accessed without the need for specialist tools.

- High performance with EC fan motor (40% lower running costs compared to a standard AC fan motor)
- Easy Cleaning and Servicing
- Can be connected to either Panasonic VRF or PACi systems
- Drain pump for cooling operation included
- HS and LS models can be controlled via Panasonic's range of remote internet controls


Heating capacity comparison: Electrical air curtain / Panasonic air curtain.

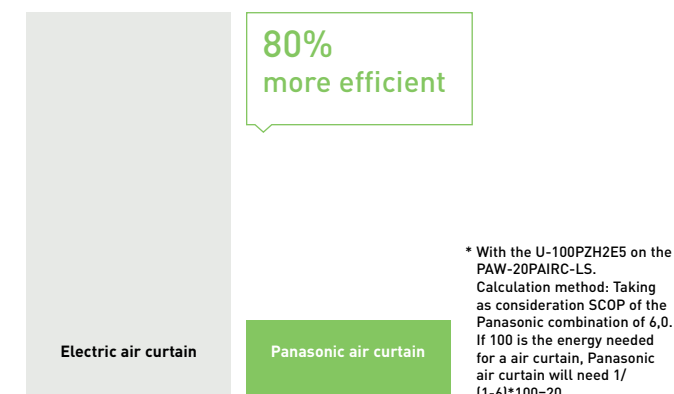

The HS and LS models are ideal for connection to a ECOi or PACi system. With simple "Plug & Play" installation, both are fitted with an EC fan motor for a smooth operation and efficient performance. This fan guarantees 40% lower running cost than with a standard AC fan motor. Air curtains run approximately 12 hours per day at shops, and efficient performance contributes to energy savings.

Optimised air flow velocity

- 1 | Energy losses, no air curtain installed
- 2 | Too low velocity air curtain – air curtain not efficient

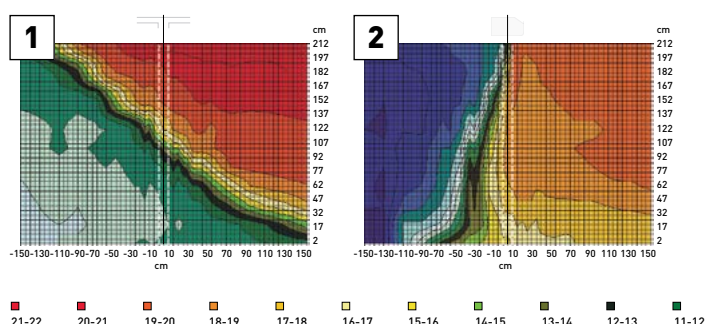


Opening without air curtain.

In an unprotected opening the cold air flows out and the cold storage room becomes much too warm.

Opening with air curtain, wrong angle.

If the angle is too small the hot air is blown into the cold storage room.

- 3 | Too high velocity air curtain – considerable turbulence, energy lost to the outside, air curtain not efficient
- 4 | Optimum results with the Frico air curtain connected to Panasonic VRF

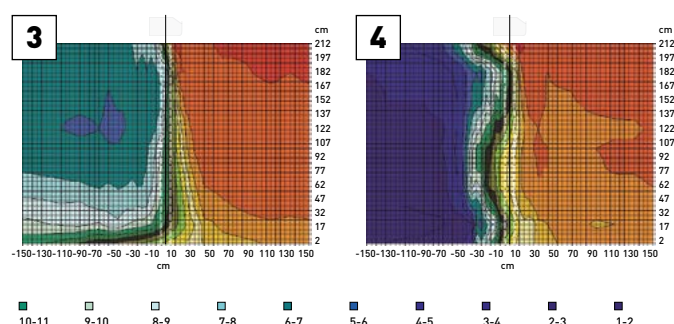

Opening with air curtain, too high speed.


Excessive speed creates turbulence, which causes energy loss and increases the cold storage temperature.

Opening with correctly adjusted air curtain.

With a correctly set air curtain unit there is a sharp separation between the different temperature zones.

Intelligent operation

Our air curtains combine air flow and heating / cooling technology to ensure optimum comfort and energy efficiency whilst also creating an effective barrier between indoor and outdoor environments. Design and installation is key to achieving the correct height / temperature settings to achieve optimum performance. Our air curtains are designed to answer the demands of the retail, commercial and industrial markets.

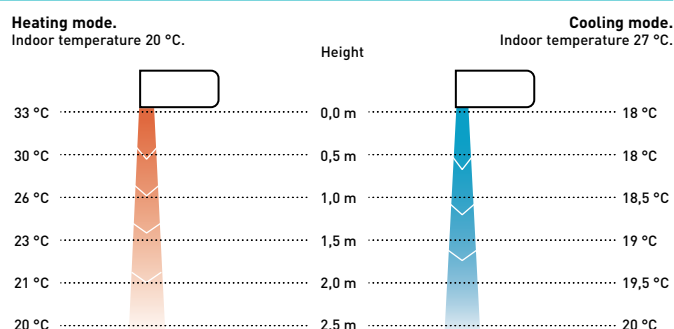

Air curtain with DX coil, connected to PACi NX and PACi

Comfort: Easy redirection of air flow by means of manual deflector.

Ease of use: Speed selector (high and low) on the unit itself.

Easy installation and maintenance: Easy installation / Compact dimensions improve installation and positioning / Easy cleaning of grid without opening of the unit.



Outdoor unit capacity			7,1 kW	10,0 kW	14,0 kW	20,0 kW
Air outlet height 2,7 m			PAW-10PAIRC-LS-1	PAW-15PAIRC-LS-1	PAW-20PAIRC-LS-1	PAW-25PAIRC-LS-1
Cooling capacity ¹⁾	Max	kW	6,1	9,7	13,0	17,0
Heating capacity ²⁾	Max	kW	7,9	12,0	15,0	19,0
Air flow	High	m³/h	1800	2700	3600	4500
Heat Exchanger	Volume	L	1,67	2,85	3,94	5,03
Electric consumption fan	230 V / 50 Hz	kW	0,30	0,50	0,60	0,80
Current	230 V / 50 Hz	A	2,10	3,10	4,10	5,10
Sound pressure ³⁾	Max	dB(A)	65	66	67	69
Air outlet height 3,0 m			PAW-10PAIRC-HS-1	PAW-15PAIRC-HS-1	PAW-20PAIRC-HS-1	PAW-25PAIRC-HS-1
Cooling capacity ¹⁾	Max	kW	9,1	13,0	19,5	23,7
Heating capacity ²⁾	Max	kW	11,8	15,8	23,6	27,6
Air flow	High	m³/h	2700	3600	5400	6300
Heat Exchanger	Volume	L	1,67	2,85	3,94	5,12
Electric consumption fan	230 V / 50 Hz	kW	0,75	1,00	1,50	1,75
Current	230 V / 50 Hz	A	4,10	5,50	8,20	9,60
Sound pressure ³⁾	Max	dB(A)	66	67	68	68
Common data						
Dimension ⁴⁾	H x W x D	mm	260 (+140) x 1000 x 460	260 (+140) x 1500 x 460	260 (+140) x 2000 x 460	260 (+140) x 2500 x 460
Net weight	Air outlet height 2,7 m	kg	50	65	80	95
	Air outlet height 3,0 m	kg	55	65	85	110
Fan type			EC	EC	EC	EC
Piping diameter	Liquid / Gas	Inch (mm)	3/8 (9,52) / 5/8 (15,88)	3/8 (9,52) / 3/4 (19,05)	3/8 (9,52) / 7/8 (22,22)	3/8 (9,52) / 7/8 (22,22)
Door width		m	1,0	1,5	2,0	2,5
Refrigerant			R32	R32	R32	R32

LS / PACi outdoor combination*	PACi Elite			PACi Standard		
Operation until	40 °C	35 °C	30 °C	40 °C	35 °C	30 °C
PAW-10PAIRC-LS-1	U-100	U-100	U-50	U-100	U-100	U-60
PAW-15PAIRC-LS-1	U-200	U-100	U-100	—	U-100	U-100
PAW-20PAIRC-LS-1	U-200	U-140	U-100	—	—	U-100
PAW-25PAIRC-LS-1	U-250	U-200	U-125	—	—	U-125

HS / PACi outdoor combination*	PACi Elite			PACi Standard		
Operation until	40 °C	35 °C	30 °C	40 °C	35 °C	30 °C
PAW-10PAIRC-HS-1	U-200	U-100	U-100	—	U-100	U-100
PAW-15PAIRC-HS-1	U-200	U-200	U-100	—	U-200	U-100
PAW-20PAIRC-HS-1	—	U-250	U-200	—	U-250	—
PAW-25PAIRC-HS-1	—	U-250	U-200	—	U-250	—


1) Cooling capacity DX coil, air temperature in / out +27 / +18 °C, R32 and R410. 2) Heating capacity condenser, air temperature in / out +20 / +33 °C, R32 and R410. In the case of lower outdoor temperatures, an outdoor model with higher capacity may be necessary. 3) Measured in distance up to 5,0 m, direction factor 2, absorbing surfaces 200 m², Min / Max air flow. 4) 140 mm is the height of an electrical box if it is installed on the top. * Available with PZH2 and PZ2. PZH3 and PZ3 will be compatible from Spring 2024.

Technical focus

- Now compatible with PACi NX Series
- Save up to 40% energy costs by use of the integrated EC fan technology (higher efficiency than conventional AC fan, soft start and longer motor duration)
- 4 length of air curtain LS and HS are available 1,0, 1,5, 2,0 and 2,5 m
- Installation height up to 3,0 m
- Outlet grilles can be adjusted in five positions, to suite different indoor and installation requirements
- Control with Panasonic remote control systems (optional)
- Direct integration to BMS via optional Panasonic interfaces
- Drip tray included in all DX air curtains
- Drain pump included

How does it work?

Stale air from the room is taken in and ejected near the door. This creates a 'roll of air' that shields the door area, mixing with the colder incoming air. It then turns away from the door, back into the room and toward the intake screen, where it is partly drawn in again. This flow of air helps to create a barrier for heat loss yet at the same time refreshes room air

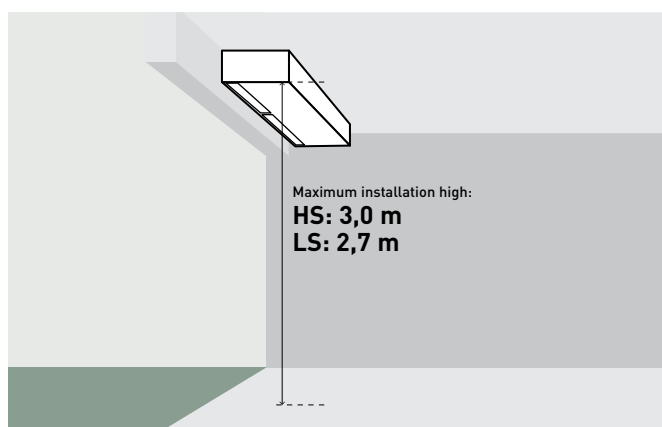

Air curtain with DX coil, connected to VRF systems

Comfort: Easy redirection of air flow by means of manual deflector.

Ease of use: Speed selector (high and low) on the unit itself.

Easy installation and maintenance: Easy installation / Compact dimensions improve installation and positioning / Easy cleaning of grid without opening of the unit.



Outdoor unit capacity			4 HP	4 HP	5 HP	8 HP
Air outlet height 2,7 m			PAW-10EAIRC-LS	PAW-15EAIRC-LS	PAW-20EAIRC-LS	PAW-25EAIRC-LS
Cooling capacity ¹⁾	Max	kW	6,1	9,7	13,0	17,0
Heating capacity ²⁾	Max	kW	7,9	12,0	15,0	19,0
Air flow	High	m ³ /h	1800	2700	3600	4500
Heat Exchanger	Volume	L	1,67	2,85	3,94	5,03
Electric consumption fan	230 V / 50 Hz	kW	0,30	0,50	0,60	0,80
Current	230 V / 50 Hz	A	2,10	3,10	4,10	5,10
Sound pressure ³⁾	Max	dB(A)	65	66	67	69
Air outlet height 3,0 m			PAW-10EAIRC-HS	PAW-15EAIRC-HS	PAW-20EAIRC-HS	PAW-25EAIRC-HS
Cooling capacity ¹⁾	Max	kW	9,1	13,0	19,5	23,7
Heating capacity ²⁾	Max	kW	11,8	15,8	23,6	27,6
Air flow	High	m ³ /h	2700	3600	5400	6300
Heat Exchanger	Volume	L	1,67	2,85	3,94	5,12
Electric consumption fan	230 V / 50 Hz	kW	0,75	1,00	1,50	1,75
Current	230 V / 50 Hz	A	4,10	5,50	8,20	9,60
Sound pressure ³⁾	Max	dB(A)	66	67	68	68
Common data						
Dimension ⁴⁾	HxWxD	mm	260 (+140) x 1000 x 460	260 (+140) x 1500 x 460	260 (+140) x 2000 x 460	260 (+140) x 2500 x 460
Net weight	Air outlet height 2,7 m	kg	50	65	80	95
	Air outlet height 3,0 m	kg	55	65	85	110
Fan type			EC	EC	EC	EC
Piping diameter	Liquid / Gas	Inch (mm)	3/8 (9,52) / 5/8 (15,88)	3/8 (9,52) / 3/4 (19,05)	3/8 (9,52) / 7/8 (22,22)	3/8 (9,52) / 7/8 (22,22)
Door width		m	1,0	1,5	2,0	2,5
Refrigerant			R32 / R410A	R32 / R410A	R32 / R410A	R32 / R410A

LS / VRF outdoor combination

Operation until	40 °C	35 °C	30 °C
PAW-1EAIRC-LS	U-4	U-4	U-4
PAW-15EAIRC-LS	U-6	U-5	U-4
PAW-20EAIRC-LS	U-8	U-6	U-4
PAW-25EAIRC-LS	U-8	U-8	U-5

HS / VRF outdoor combination

Operation until	40 °C	35 °C	30 °C
PAW-10EAIRC-HS	U-6	U-5	U-4
PAW-15EAIRC-HS	U-8	U-6	U-4
PAW-20EAIRC-HS	U-8	U-8	U-8
PAW-25EAIRC-HS	U-12	U-10	U-8


1) Cooling capacity DX coil, air temperature in / out +27 / +18 °C, R32 and R410. 2) Heating capacity condenser, air temperature in / out +20 / +33 °C, R32 and R410. In the case of lower outdoor temperatures, an outdoor model with higher capacity may be necessary. 3) Measured in distance up to 5,0 m, direction factor 2, absorbing surfaces 200 m², Min / Max air flow. 4) 140 mm is the height of an electrical box if it is installed on the top. * Also compatible with ECO G Series (GE3 and GF3) and Hybrid Serie.

Technical focus

- Compatible with R32 and R410A refrigerant
- Save up to 40% energy costs by use of the integrated EC fan technology (higher efficiency than conventional AC fan, soft start and longer motor duration)
- 4 length of air curtain LS and HS are available 1,0, 1,5, 2,0 and 2,5 m
- Installation height up to 3,0 m
- Outlet grilles can be adjusted in five positions, to suite different indoor and installation requirements
- Control with Panasonic remote control systems (optional)
- Direct integration to BMS via optional Panasonic interfaces
- Drip tray included in all DX air curtains
- Drain pump included

Internet control

An app added to your tablet or smartphone or via the Internet allows you to control and manage the system remotely. There is also the option to integrate into existing BMS systems by using other Panasonic interfaces.

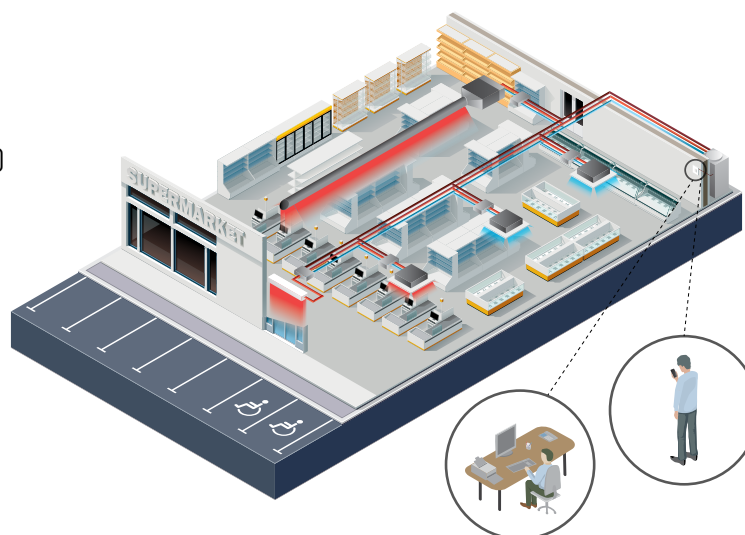

High pressure duct and 100% fresh air duct function for all ECOi and ECO G systems

The E2 range of ducted units offers improved design flexibility for extended duct layouts as a result of their increased external static pressures whilst reducing energy consumption, while providing fresh air to larger spaces.



E2 type high static pressure hide-away · R410A

High pressure duct and 100% fresh air duct function.



+ COMPATIBLE WITH ALL PANASONIC CONNECTIVITY SOLUTIONS. FOR DETAILED INFORMATION GO TO THE CONTROL SYSTEMS SECTION

Type		100% Fresh air duct function (by using Kit for 100% fresh air)				High pressure duct			
Indoor unit		S-224ME2E5		S-280ME2E5		S-224ME2E5		S-280ME2E5	
		Cooling	Heating	Cooling	Heating	Cooling	Heating	Cooling	Heating
Capacity	kW	22,4	21,2	28,0	26,5	22,4	25,0	28,0	31,5
Input power	W	290,00	290,00	350,00	350,00	440,00	440,00	715,00	715,00
Current	A	1,85	1,85	2,20	2,20	2,45	2,45	3,95	3,95
Air flow	Hi/Med/Lo	m ³ /min	28,3/-/-	35,0/-/-	56,0/51,0/44,0	72,0/63,0/53,0			
External static pressure	Pa	200		200		140(60-270) ¹⁾		140(72-270) ¹⁾	
Sound pressure ²⁾	Hi/Med/Lo	dB(A)		43/-/-		44/-/-		45/43/41	
Sound power	Hi/Med/Lo	dB(A)		75/-/-		76/-/-		77/75/73	
Dimension	H x W x D	mm		479 x 1453 x 1205		479 x 1453 x 1205		479 x 1453 x 1205	
Net weight	kg	102		106		102		106	
Piping diameter	Liquid	Inch (mm)	3/8(9,52)	3/8(9,52)	3/8(9,52)	3/8(9,52)	3/8(9,52)	3/8(9,52)	3/8(9,52)
	Gas	Inch (mm)	3/4(19,05)	7/8(22,22)	7/8(22,22)	3/4(19,05)	7/8(22,22)	7/8(22,22)	7/8(22,22)

Rating Conditions for 100% Fresh air duct function: Cooling Outdoor 33 °C DB / 28 °C WB. Heating Outdoor 0 °C DB / -2,9 °C WB.

1) Available to select the setting by initial setup. 2) Values with 140 Pa setting. * No filter included. ** No compatible with 3-Pipe ECO G 6F3.

Accessories	
CZ-RTC6W	CONEX wired remote controller (non-wireless), white
CZ-RTC6WBL	CONEX wired remote controller with Bluetooth®, white
CZ-RTC6	CONEX wired remote controller (non-wireless), black
CZ-RTC6BL	CONEX wired remote controller with Bluetooth®, black
CZ-RTC5B	Wired remote controller with Econavi function
CZ-RWS3 + CZ-RWRC3	Infrared remote controller and receiver

Accessories	
PAW-RE2C4-MOD-WH	Room controller for hotel rooms, white
PAW-RE2C4-MOD-BK	Room controller for hotel rooms, black
PAW-RE2D4-WH	Display control for hotel rooms, white
PAW-RE2D4-BK	Display control for hotel rooms, black
CZ-CENSC1	Econavi energy saving sensor

Technical focus

- No need of rap valves for standard operation
- 100% fresh air duct function*
- DC fan motor for more savings
- Complete flexibility for ductwork design
- Can be located within a weatherproof housing for external installation
- Air OFF sensor avoids cold air dumping
- Configurable air temperature control

* Rap valves required, see 100% fresh air duct function below.

100% fresh air duct function

The E2 duct with 100% fresh air duct function have exceptional discharge temperature.

	Discharge Range		
	Min	Max	Default
Cooling	15 °C	24 °C	18 °C
Heating	17 °C	45 °C	40 °C

System example

An inspection port (450 x 450 mm or more) is required at the lower side of the indoor unit body (field supply).



Plenums

Air outlet plenum (suitable for rigid + flexible duct)		
	Number of exits with diameters	Model
S-224ME2E5	1 x 500 mm	CZ-TREMIESPW705
S-280ME2E5	1 x 500 mm	CZ-TREMIESPW706

Kit for 100% fresh air function

Kit for 2 way systems		Kit for 3 way systems	
2x CZ-P160RVK2	Rap valve kit	2x CZ-P160HR3	3 way valve kit
2x CZ-CAPE2	3 way control PCB	2x CZ-CAPE2	3 way control PCB
CZ-P680BK2BM	Distribution joint kit	CZ-P680BH2BM	Distribution joint kit
	1x remote controller		1x remote controller



ECONAVI and INTERNET CONTROL: Optional.


Ceiling mounted air-e nanoe X Generator

Bringing nature's balance indoors with Panasonic's unique nanoe™ X technology built into the air-e.

Deodorises and inhibits certain bacteria, viruses, mould, pollens and allergens for better indoor air quality.



The air-e is a stand alone device which is an easy and simple choice to improve indoor air quality. It can be easily installed to various commercial projects including refurbishments.

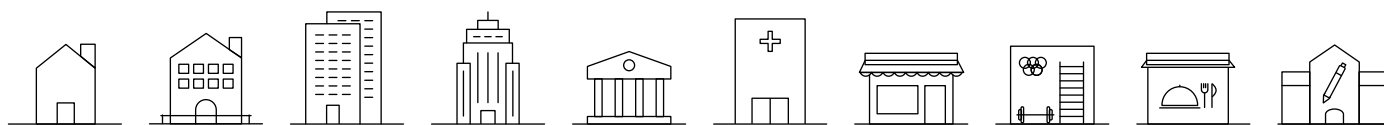

The tested effects of nanoe™ X

Bacteria and viruses.

SARS-CoV-2: 99,9% % inhibited ¹⁾.

Influenza virus H1N1 subtype: 99,9 % inhibited ²⁾.

Odour.

nanoe X Generator can reduce cigarette smoke odour intensity by 2,4 levels in 12 minutes.


1) Novel coronavirus [SARS-CoV-2] > [Test organization] Texcell (France) [Test subject] Adhered novel coronavirus [SARS-CoV-2] [Test volume] 45 L enclosed box [Test result] Inhibited 99,9% in 2 hours [Test report] 1140-01 A1.

2) Adhered virus (Influenza virus H1N1 subtype) > [Test organization] Kitasato Research Center for Environmental Science [Test subject] Influenza virus (H1N1 subtype) [Test volume] 1000 L enclosed box [Test result] Inhibited 99,9% in 2 hours [Test report] 21_0084_1.

3) Deodorisation effect for adhering odour (cigarette smoke) > [Test organization] Panasonic Product Analysis Center [Test subject] Adhered cigarette smoke odour [Test volume] Approx. 24 m³ laboratory [Test result] Odour intensity reduced 2,4 levels in 0,2 hours [Test report] 4AA33-160615-N04.

Performance of nanoe™ X might differ in real life environment and is only expected in the same room as where the unit is placed. The nanoe™ X performance varies depending on the room size, environment and usage and it may take several hours to reach the full effect. nanoe™ X is not a medical device.

Deodorisation effect for adhering odour (cigarette smoke) ³⁾.

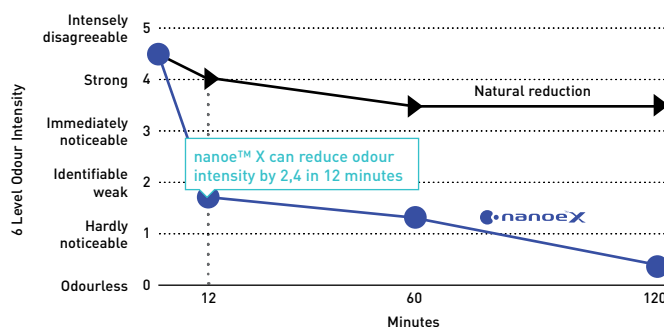

For further details and validation data, please refer to the following website.



Ceiling mounted air-e nanoe™ X Generator

- nanoe™ X technology
(Generator Mark 1: 4,8 trillion hydroxyl radicals/sec)
- Silent operation. Whisper quiet at 25,5 dB(A)*
- Low power consumption 4 W
- Easy installation
- Compact and modern design

* 230 V.

air-e™




Model	FV-15CSD16				
Power supply	Voltage	V	220	230	240
	Frequency	Hz	50	50	50
Air flow	m³/h		15	16	17
	CFM		8,8	9,4	10,0
Consumption	W		4	4	4
Sound pressure	dB(A)		23,5	25,5	27,0
Net weight	kg			1,1	

* The value of air volume, power consumption and noise are specified at static pressure 0 Pa. The value of air volume is the mean value and a tolerance of $\pm 10\%$ is allowed. The value of noise level is a weighted average sound pressure level, the mean value is measured by Panasonic. A tolerance of ± 3 dB/-7 dB is allowed. The noise is measure at 1 m apart from the left, the front and below of the tested product. Conditions of generating nanoe™ X: room temperature: about 5 °C ~ 40 °C (dew point temperature more than 2 °C), relative humidity: about 30% ~ 85%. nanoe™ X is generated using the air in the room, and its amount is subject to the temperature and humidity in the air.


One device is suitable for around 20 m² (with a ceiling height 3 m)

Ex. 3 air-e devices are required for the room size 60 m².

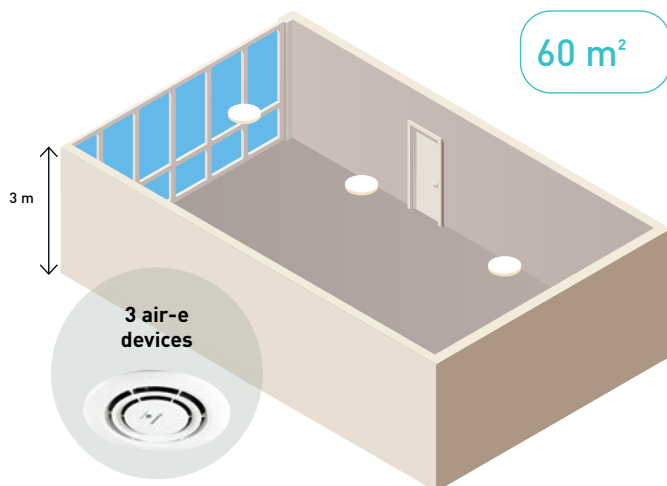

Concentration simulator is ready

See how nanoe™ X fills space.

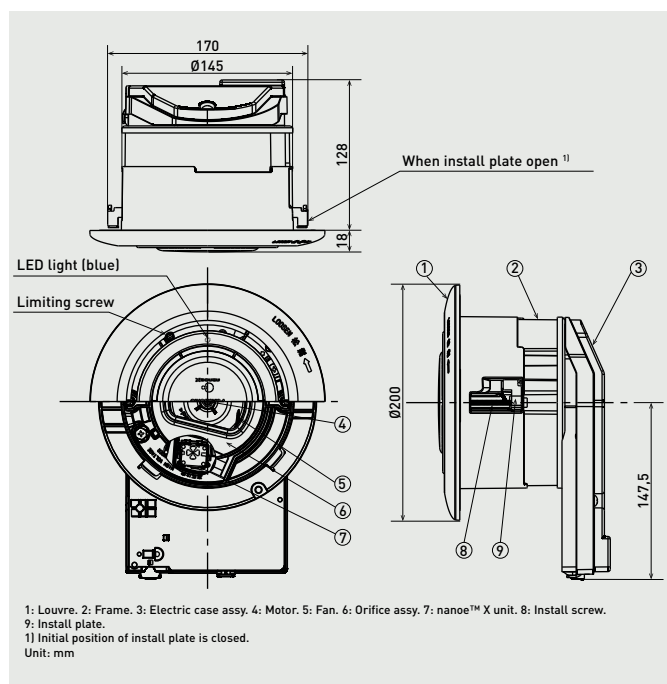

Projects with nanoe™ X.



Cabinet Dental. France.

The request by a customer to manage the indoor air quality in order to ensure irreproachable hygiene and odour control.




Mercat d'autors shop. Spain.

The nanoe™ X was chosen to ensure a cleaner air supply at a food market.

Heat recovery ventilation unit

The heat recovery ventilation unit is design not only to provide a good indoor air quality, but it is also designed to recover heat that would otherwise be lost throughout ventilation. These heat recovery ventilation systems are used to assist in the retention of heat.

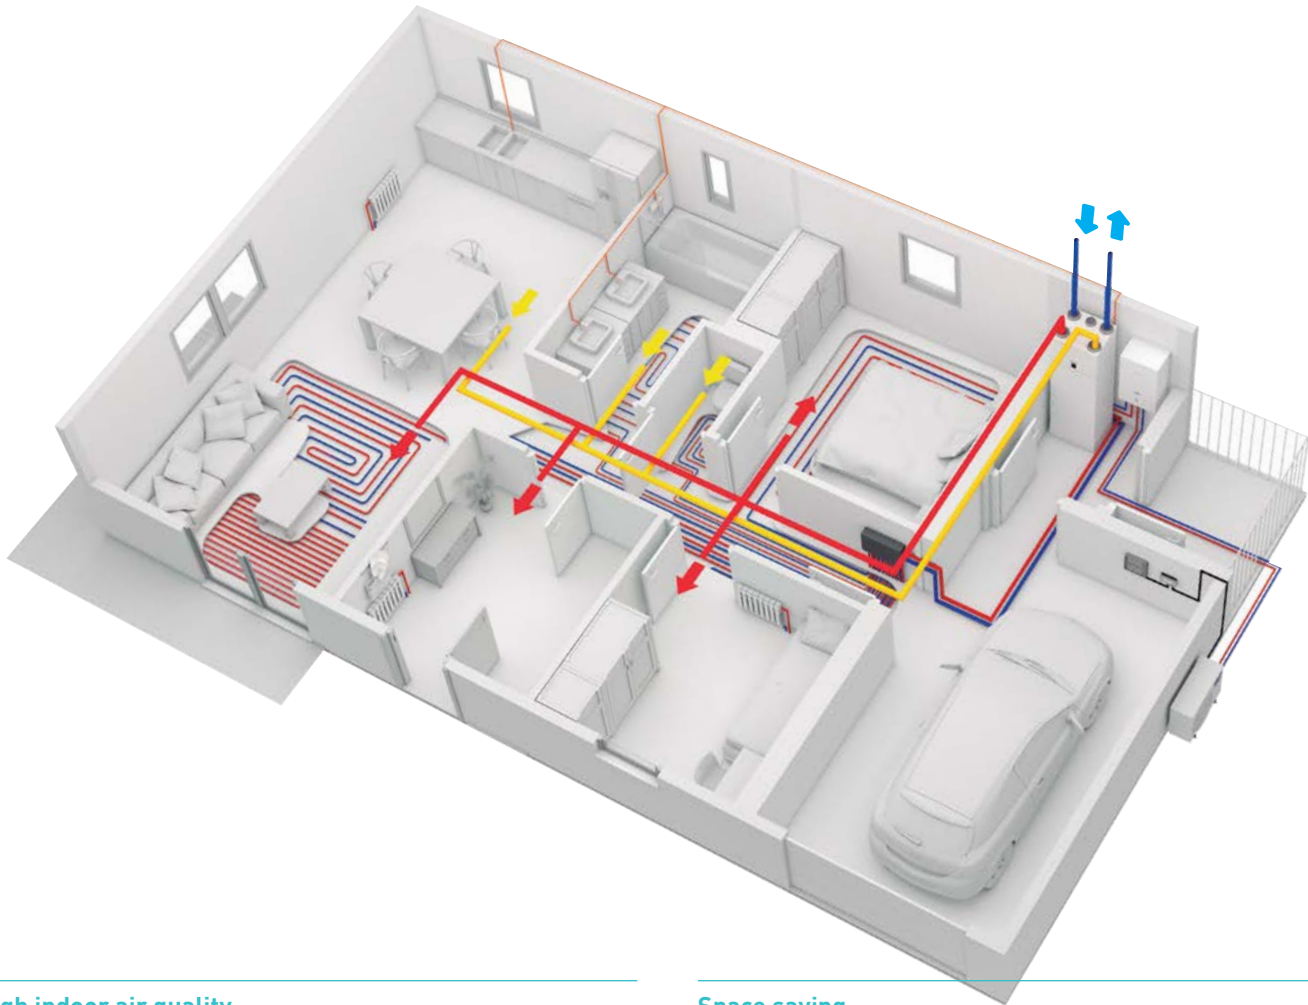

High indoor air quality

The unit is designed to provide fresh filtered air into the home, while keeping a high thermal comfort.

Energy saving

Most of the energy from the exhausted air is used to precondition the incoming air, leading to lower heating requirements in the building.

Space saving

The compact ventilation unit can be installed over the DHW square tank or the Aquarea All in One Compact indoor unit for an space-saving solution.

Better user interface


The Residential ventilation unit and the Aquarea Heat Pumps can be controlled with one single user-friendly controller.

AQUAREA

Combine the Residential ventilation unit with Panasonic Aquarea for an space saving and highly efficient solution for heating, cooling, ventilation and DHW.



Heat Recovery Ventilation +
Aquarea All in One Compact

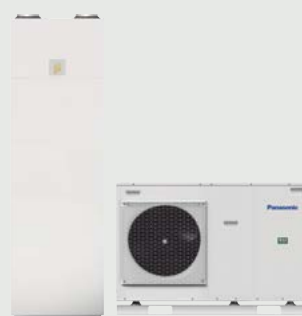

Heat Recovery Ventilation +
DHW Square Tank + Aquarea
Mono-bloc



Heat Recovery Ventilation +
DHW Square Tank + Aquarea
Bi-bloc

* The unit can be mounted on a PAW-TA20C1E5C, on a WH-ADC0309J3E5C or installed on the wall (PAW-VEN-WBRK is needed).

Heat recovery ventilation unit



PAW-A2W-VENTA-R

PAW-A2W-VENTA-L



		PAW-A2W-VENTA-R	PAW-A2W-VENTA-L
Nominal air flow rate	m³/h	204 @ 50 Pa	
Maximum air flow rate	m³/h	292 @ 100 Pa	
SPF		1,24 @ 204 m³/h	
Heat exchanger rotor drive type		Variable speed	
Exchanger type		Rotating	
Heat recovery efficiency		84%	
Power supply	V / Hz	230 / 50 / Single phase	
Power consumption	W	176	
Energy class, basic unit		A	
Energy class, unit with local control on demand		A	
Noise level	dB(A)	40	
Dimension (H x W x D)	mm	450 x 598 x 500	
Weight	kg	46	
Mounting position		Vertical	
Supply side		Right	Left
Duct connections	mm	DN125	
Filter class, supply air		F7/ePM1 60%	
Filter class, extract air		M5/ePM10 50%	
Minimum outdoor temperature	°C	-20	

* Heat recovery efficiency according to EN 13141-7. ** Heat recovery ventilation unit is produced by Systemair.

Accessories	
PAW-VEN-FLTKIT	Supply and extract filters kit
PAW-VEN-ACCPCB	Optional PCB for additional functions
PAW-VEN-DPL	HRV touch control panel. White frame (cable must be ordered separately)
PAW-VEN-CBLEXT12	Cable with plug for electrical connection between unit and control panel, type CE and CD (12 m)
PAW-VEN-DIVPLG	Twin plugs for installation of several control panels type CD ou CE for one unit

Accessories	
PAW-VEN-DPLBOX	HRV touch control panel wall-mounted kit
PAW-VEN-S-C02RH-W	CO ₂ RH wall-mounted sensor
PAW-VEN-S-C02-W	CO ₂ wall-mounted sensor
PAW-VEN-S-C02-D	CO ₂ duct sensor
PAW-VEN-WBRK	Wall bracket kit for stand-alone installation on the wall
PAW-VEN-HTR06	Electrical duct heater 0,6 kW (includes relay)
PAW-VEN-HTR12	Electrical duct heater 1,2 kW (includes relay)



Main features of the residential ventilation unit

- Designed for areas up to approximately 140 m²
- High energy-efficiency rotary heat exchanger with EC - technology fans
- Moisture transfer function to minimize condensation in supply air during wintertime
- The built in humidity sensor in extract air can be used for demand control
- Control via touch display and Startup Wizard for easy commissioning
- Modbus communication via RS-485
- Option to control an Aquarea H Series onwards heat pump from PAW-A2W-VENTA control panel (PAW-AW-MBS-H and PAW-VEN-ACCPCB required)

Control user-friendly interface

All settings and features accessible via a control panel, integrated into the front cover. The option for connecting one or more external control panels is available.

- Color touch screen with a user-friendly interface
- MANUAL and AUTO mode or choose preferred settings from the pre-configured user modes
- If Aquarea H and J Series heat pumps are connected with PAW-A2W-VENTA, the heat pump control options appear on the home screen in a separate tab

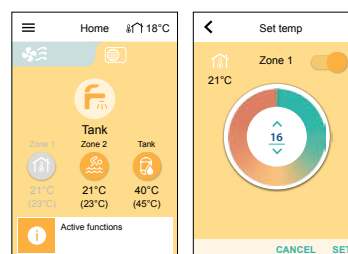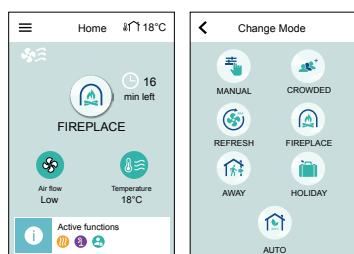


Counter flow ventilation

Controlled mechanical ventilation ensures the supply of fresh air inside a building in order to guarantee a good indoor air quality.



Counter flow ventilation units are equipped with two fans to supply and extract air. A cross-flow heat exchanger recovers the energy contained in the extracted air and transfers it to the supplied air. This significantly reduces the building's energy consumption, while at the same time keeping a good quality of the indoor air.

Balanced ventilation

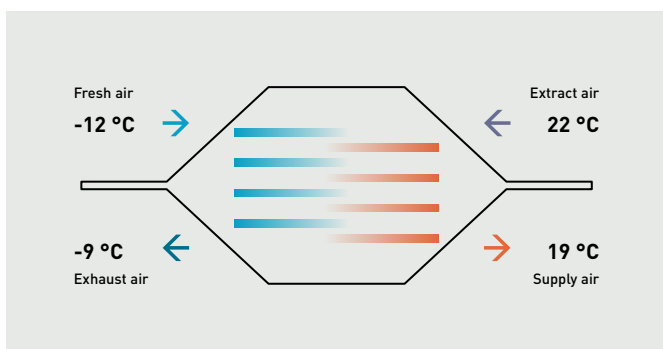

- Suitable for single family houses or apartments with low energy requirements
- High-efficiency sensible heat recovery, thanks to polypropylene counter-flow heat exchanger with large exchange surface and low pressure drop
- High comfort and quiet operation, by using brushless fans with electronic motor and modulating control
- Highly efficient air renewal and filtration, with 80% ePM1 filters
- 3 unit types: compact universal mounting (Z), horizontal mounting (H) and vertical mounting (V)
- Compact dimensions for simplified installation and panel easily accessible for maintenance and inspection

Counter flow ventilation

PAW-VENTX10-15-20-25Z-1



PAW-VENTX20-30-40-50V-1



PAW-VENTX20-30-40-50H-1



PAW-	Air flow	Static pressure	Type of HEX	Recovery efficiency	Energy class	Power supply	Power consumption	Sound power LWA	Dimension	Weight	Mounting position	Filter class	Duct connection
	Nominal / Max m³/h	Nominal / Max Pa		%		Voltage / Phase / Frequency	Nominal W	dB(A)	H x W x D mm	kg			mm
VENTX10Z-1	91/130	50/100	Counter flow HRV	87	A	230 V / Single phase / 50 Hz	80	48	255 x 580 x 580	19	Horizontal / Vertical	ePM1 80%	160
VENTX15Z-1	147/210	50/100	Counter flow HRV	85	A	230 V / Single phase / 50 Hz	140	51	255 x 580 x 580	19	Horizontal / Vertical	ePM1 80%	160
VENTX20Z-1	140/200	50/100	Counter flow HRV	87	A	230 V / Single phase / 50 Hz	120	48	313 x 580 x 580	21	Horizontal / Vertical	ePM1 80%	160
VENTX20H-1	109/155	50/100	Counter flow HRV	86	A	230 V / Single phase / 50 Hz	110	49	270 x 480 x 800	26	Horizontal	ePM1 80%	160
VENTX20V-1	112/170	50/100	Counter flow HRV	86	A	230 V / Single phase / 50 Hz	110	48	510 x 625 x 430	32	Vertical	ePM1 80%	160
VENTX25Z-1	224/320	50/100	Counter flow HRV	85	A	230 V / Single phase / 50 Hz	180	52	313 x 580 x 580	21	Horizontal / Vertical	ePM1 80%	160
VENTX30H-1	210/300	50/100	Counter flow HRV	85	A	230 V / Single phase / 50 Hz	180	50	295 x 795 x 795	31	Horizontal	ePM1 70%	160
VENTX30V-1	210/300	50/100	Counter flow HRV	86	A	230 V / Single phase / 50 Hz	180	50	590 x 785 x 575	38	Vertical	ePM1 70%	160
VENTX40H-1	238/340	50/100	Counter flow HRV	89	A	230 V / Single phase / 50 Hz	350	52	290 x 1150 x 1150	39	Horizontal	ePM1 70%	160
VENTX40V-1	266/380	50/100	Counter flow HRV	87	A	230 V / Single phase / 50 Hz	350	51	590 x 785 x 735	42	Vertical	ePM1 70%	160
VENTX50H-1	288/455	50/100	Counter flow HRV	88	A	230 V / Single phase / 50 Hz	420	56	290 x 1150 x 1150	40	Horizontal	ePM1 70%	160
VENTX50V-1	315/450	50/100	Counter flow HRV	86	A	230 V / Single phase / 50 Hz	420	54	590 x 785 x 735	43	Vertical	ePM1 70%	160

Remote control (sold separately).

Digital remote control with built-in air quality, temperature and humidity sensors (black).

PAW-VEN-CTRLB.



Digital remote control with built-in air quality, temperature and humidity sensors (white).

PAW-VEN-CTRLW.



Accessories

PAW-VEN-HTR05	Electrical duct heater 0,5 kW, DN160 mm
PAW-VEN-HTR10	Electrical duct heater 1,0 kW, DN160 mm
PAW-VEN-FLT1	Spare F7 filter kit (2 pcs) for models 10Z, 15Z, 20H and 20V
PAW-VEN-FLT2	Spare F7 filter kit (2 pcs) for models 30H
PAW-VEN-FLT3	Spare F7 filter kit (2 pcs) for models 40H
PAW-VEN-FLT4	Spare F7 filter kit (2 pcs) for models 40V
PAW-VEN-FLT5	Spare F7 filter kit (2 pcs) for models 30V


Accessories

PAW-VEN-ACFLT1	Activated carbon filter (1 pc) for models 10Z, 15Z, 20H and 20V
PAW-VEN-ACFLT2	Activated carbon filter (1 pc) for models 30H
PAW-VEN-ACFLT3	Activated carbon filter (1 pc) for models 40H
PAW-VEN-ACFLT4	Activated carbon filter (1 pc) for models 40V
PAW-VEN-ACFLT5	Activated carbon filter (1 pc) for models 30V

Dimensions

Ventilation	
AHU connection kit for PACi, ECOi and ECO G	→ 515
Advanced energy recovery ventilation - ZY Series	→ 515
Energy recovery ventilation - ZDY Series	→ 516
ERV with DX coil - HRPT Series	→ 517
Heat recovery with DX coil - ZDX Series	→ 518
Electric air curtain	→ 518
Air curtain with DX coil	→ 519
E2 type high static pressure hide-away	→ 519
Ceiling mounted air-e nanoe X Generator	→ 520
Heat recovery ventilation unit	→ 520
Counter flow ventilation	→ 521

AHU connection kit for PACi, ECOi and ECO G.

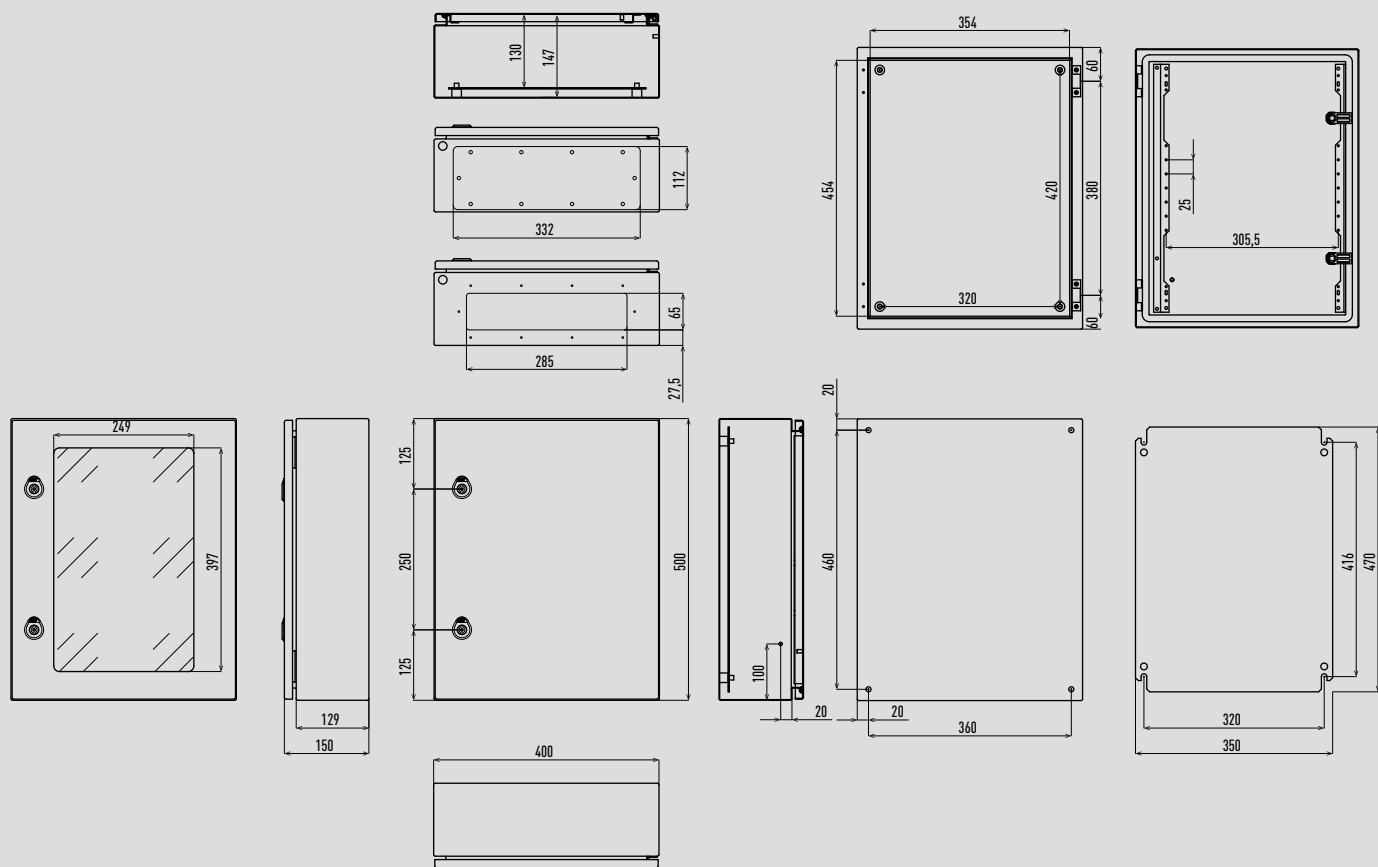


Unit: mm

Advanced energy recovery ventilation - ZY Series.

FV-15ZY1G / FV-25ZY1G / FV-35ZY1G / FV-50ZY1G / FV-65ZY1G / FV-80ZY1G / FV-1KZY1G

	A	B	C	D	E	F	G	H	J	K	L	M	N	Duct diameter
FV-15ZY1G	860	666	786	610	289	144,5	102	Ø97,6	Ø150	395	107,5	116	168	Ø100
FV-25ZY1G	860	791	786	735	289	144,5	102	Ø145	Ø200	470	132,5	116	168	Ø150
FV-35ZY1G	968	930	895	874	331	165,5	102	Ø145	Ø200	609	132,5	115	168	Ø150
FV-50ZY1G	968	1072	895	1016	331	165,5	114	Ø195	Ø250	665	175,5	115	168	Ø200
FV-65ZY1G	1008	1010	934	954	404	202	114	Ø195	Ø250	638	158	121	168	Ø200
FV-80ZY1G	1224	1060	1148	1004	404	202	122	Ø245	Ø300	633	185,5	121	168	Ø250
FV-1KZY1G	1224	1287	1148	1231	404	202	122	Ø245	Ø300	860	185,5	121	168	Ø250

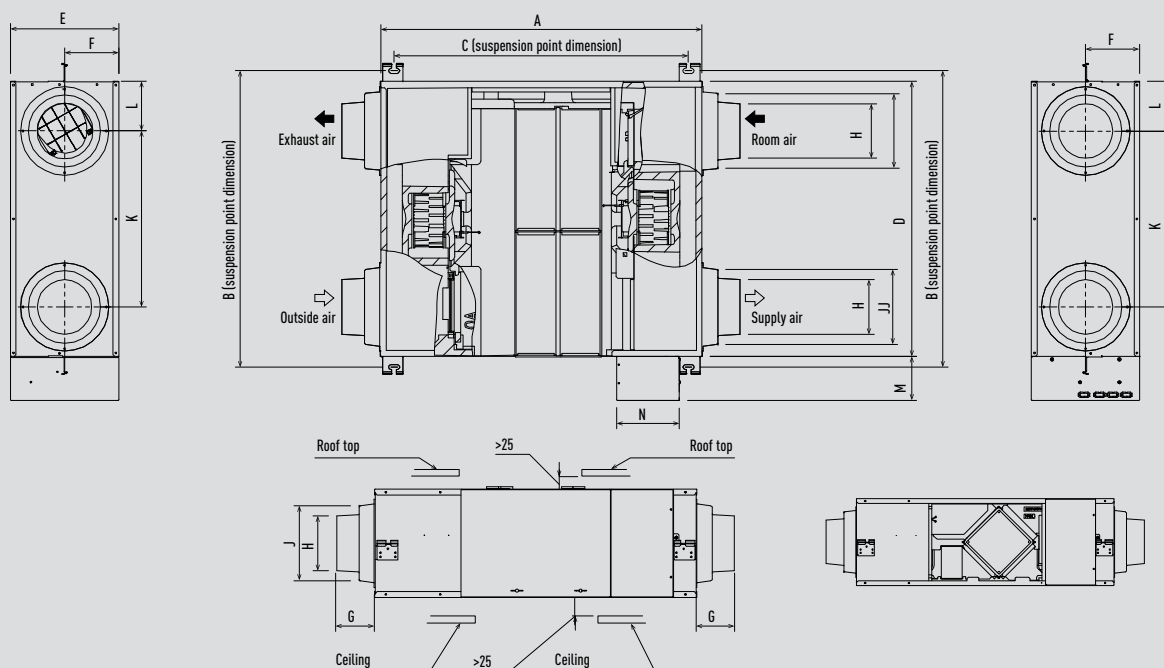


Unit: mm

Advanced energy recovery ventilation - ZY Series.


FV-1HZY1G / FV-2KZY1G

	A	B	C	D	E	F	G	H	J	K	L	M	N	Duct diameter
FV-1HZY1G	1224	1141	1127	1004	808	202	122	Ø245	Ø300	663	185.5	121	168	Ø250
FV-2KZY1G	1224	1368	1127	1231	808	202	122	Ø245	Ø300	860	185.5	121	168	Ø250

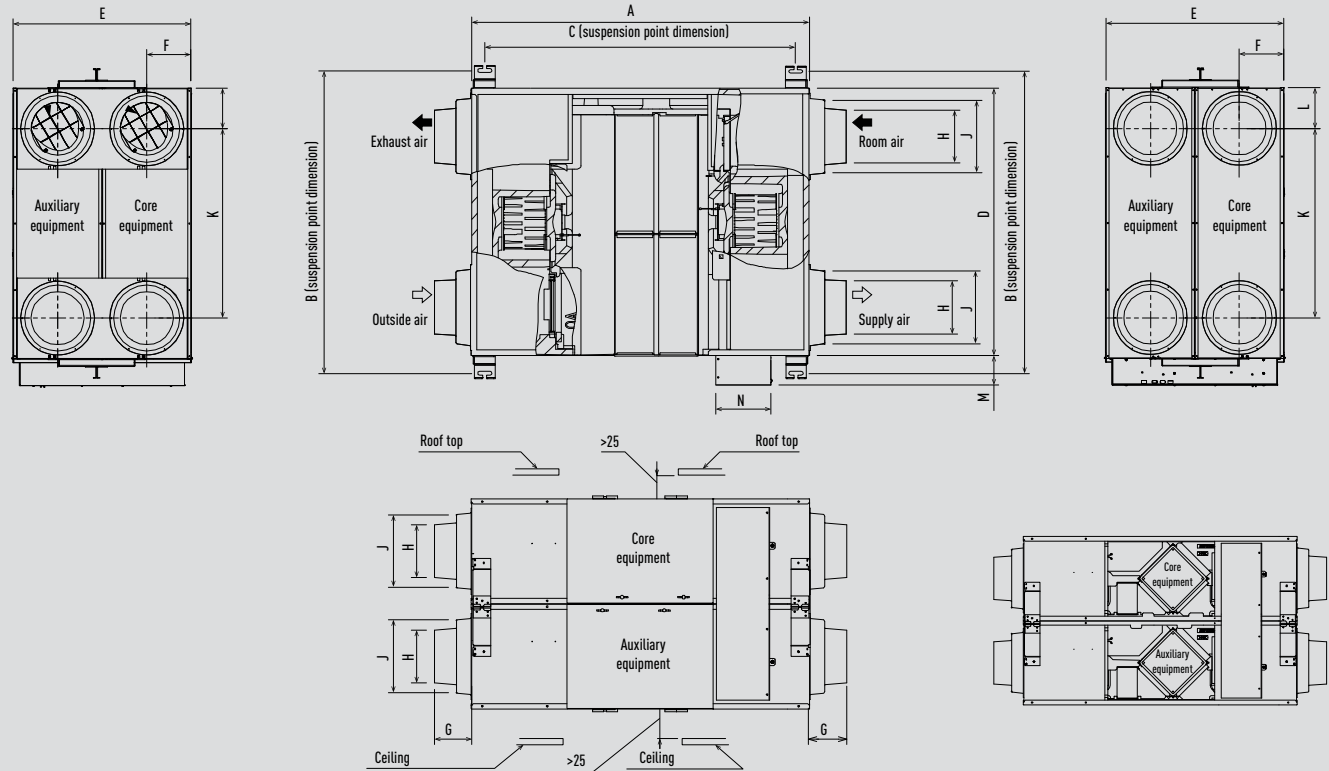

Unit: mm


Energy recovery ventilation - ZDY Series.

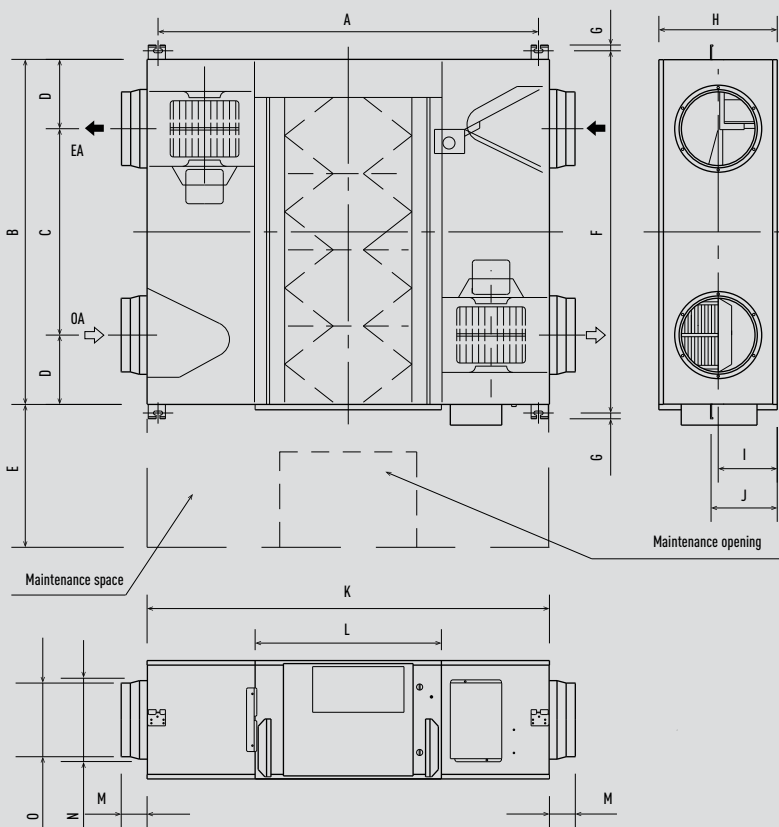

	FY-250ZDY8R	FY-350ZDY8R	FY-500ZDY8R	FY-800ZDY8R	FY-01KZDY8R
A	810	978	1018	1250	1250
B	599	804	904	884	1134
C	315	580	640	428	678
D	142	112	132	228	228
E	600	600	600	600	600
F	655	860	960	940	1190
G	19	19	19	19	19
H	270	317	317	388	388
I	135	159	159	194	194
J	159	182	182	218	218
K	882	1050	1090	1322	1322
L	414	470	470	612	612
M	95	70	70	85	85
N	164	164	210	258	258
O	144	144	194	242	242


Unit: mm

ERV with DX coil - HRPT Series - PAW-HRPT40HX.

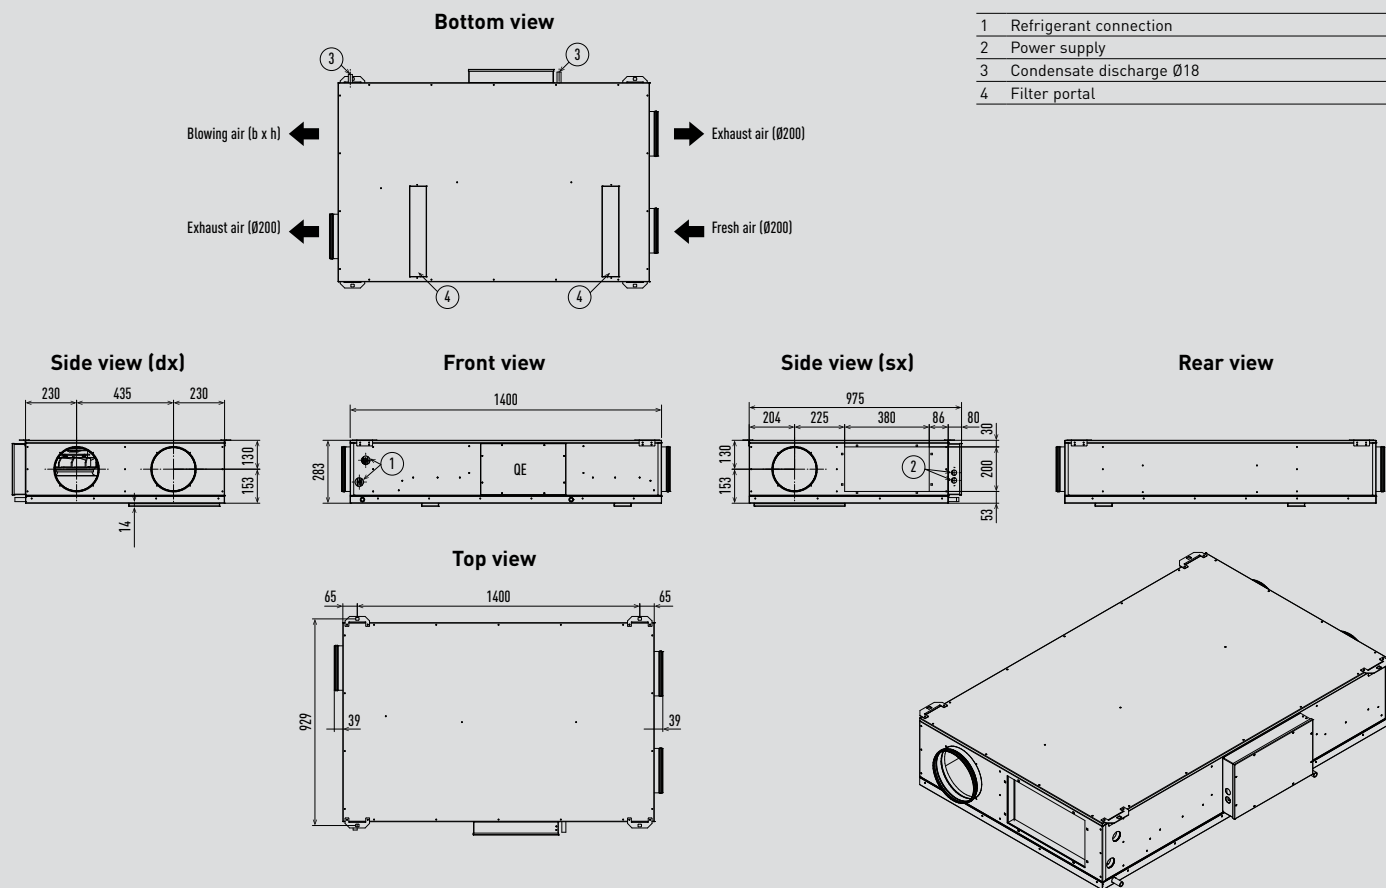

Unit: mm


ERV with DX coil - HRPT Series - PAW-HRPT80HX / PAW-HRPT120HX / PAW-HRPT160HX / PAW-HRPT200HX.

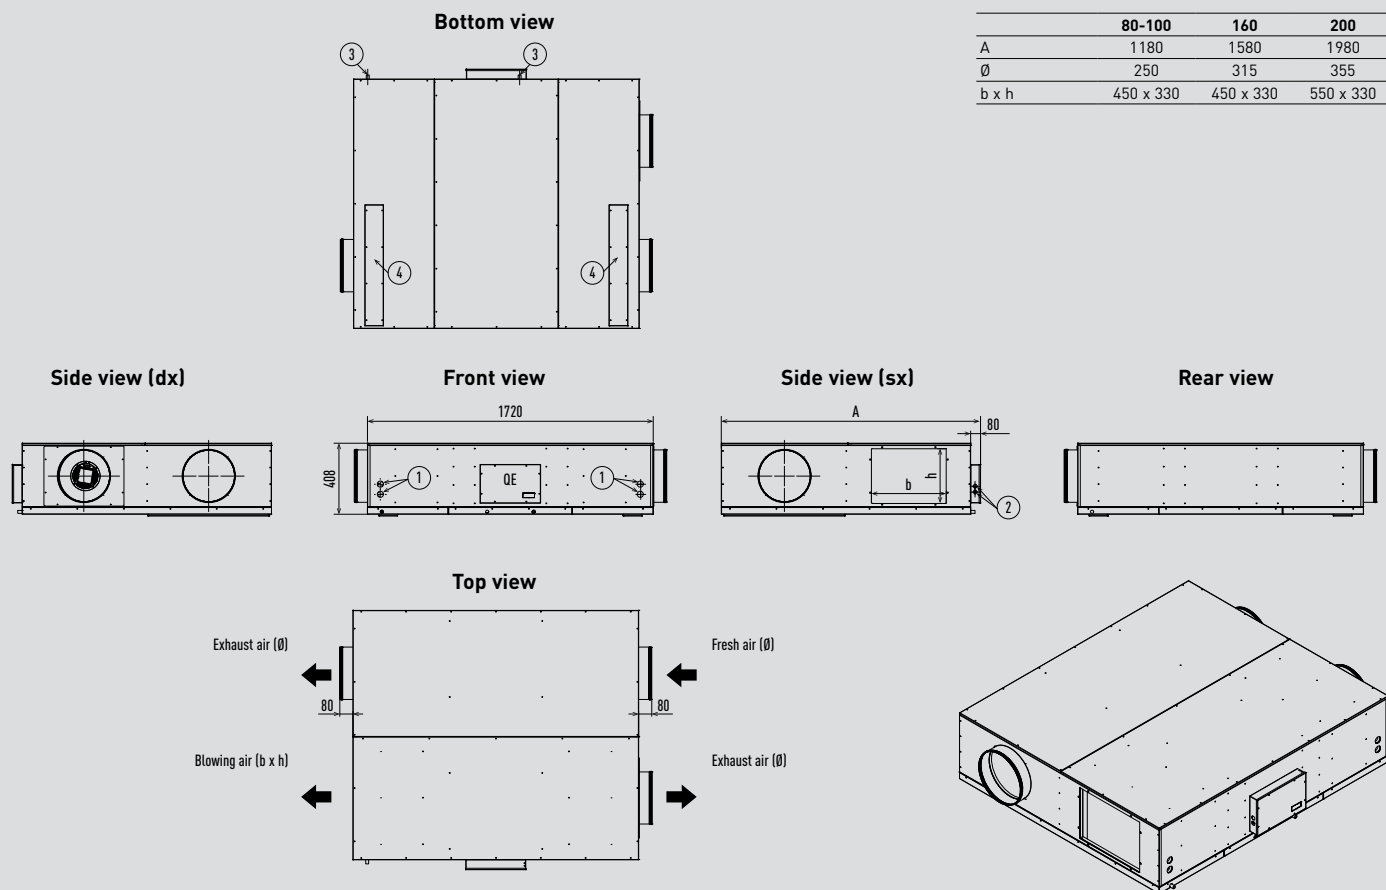

Unit: mm


Heat recovery with DX coil - ZDX Series.

	A	B	C	D	E	E1	F	F1	G	L	T	K	M	N	P	R	S	Y	Z	Net weight
PAW-500ZDX3N	904	1400	107	200	825	1395	960	830	19	955	500	135	270	350	135	135	202	350	135	90 - 98
PAW-800ZDX3N	1134	1745	85	250	1115	1735	1190	1060	19	1200	678	170	388	500	170	170	228	415	195	100 - 110
PAW-01KZDX3N	1216	1700	85	250	1130	1700	1273	1140	19	1290	621	171	388	550	146	241	151	415	195	105 - 120

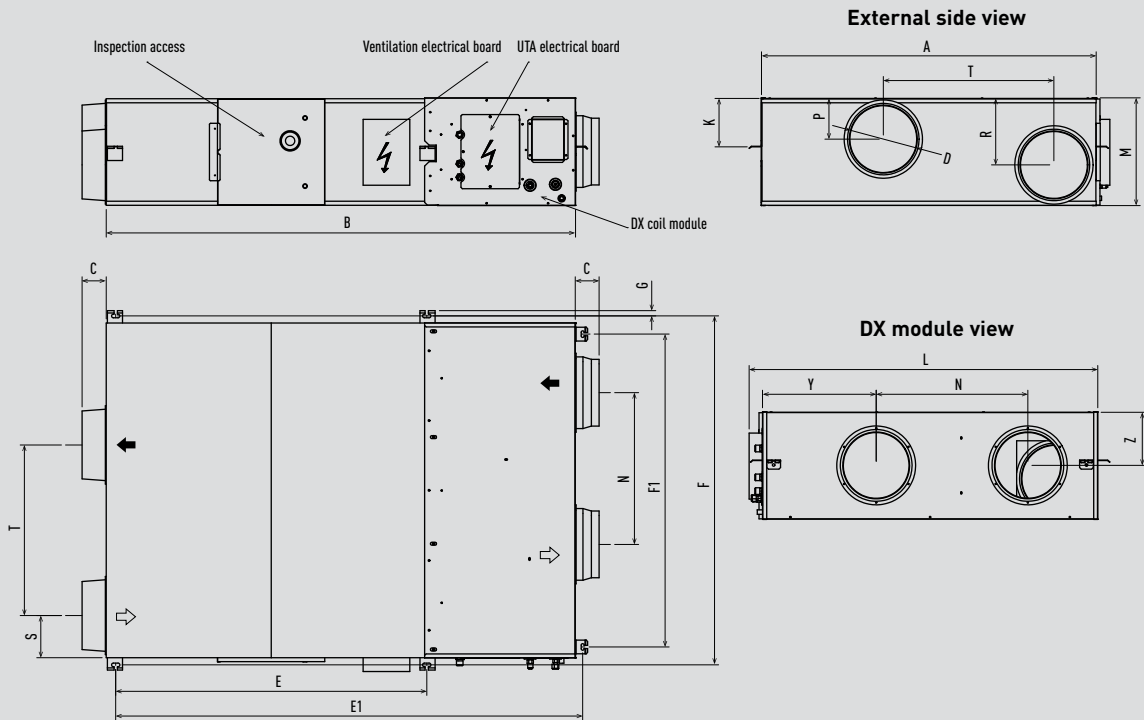

Unit: mm

Electric air curtain.

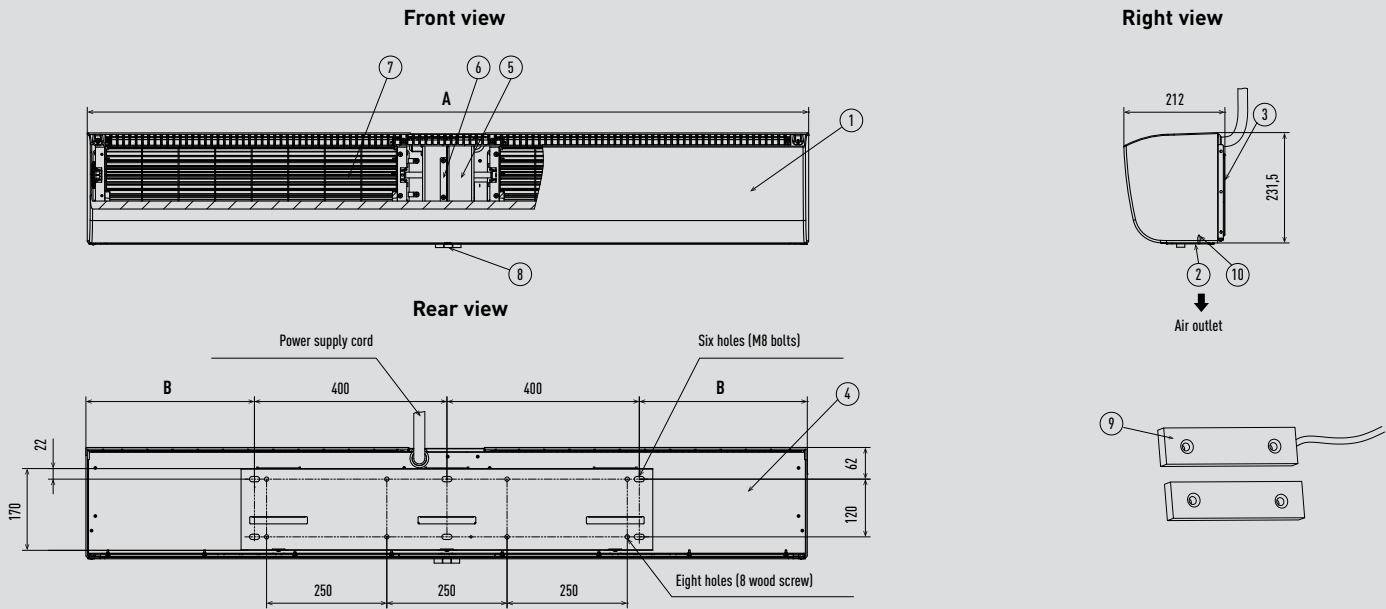


1	Front panel
2	Air outlet
3	Mounting plate
4	Back panel
5	Motor

6	Motor support
7	Cross-flow impeller
8	Push-button switch
9	Gate magnetic switch
10	Guide plate

	FY-3009U1	FY-3012U1	FY-3015U1
A	900	1200	1500
B	50	200	350

Unit: mm


Air curtain with DX coil.

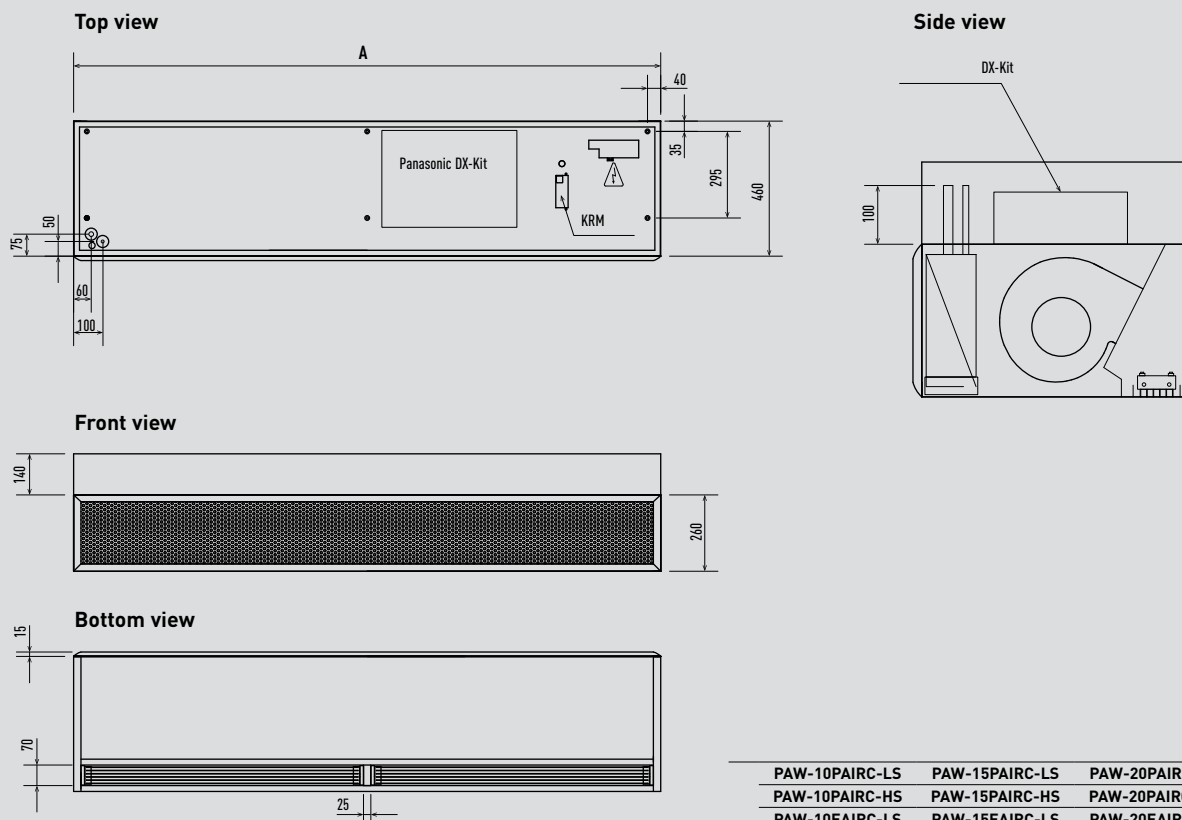

	PAW-10PAIRC-LS	PAW-15PAIRC-LS	PAW-20PAIRC-LS	PAW-25PAIRC-LS
	PAW-10PAIRC-HS	PAW-15PAIRC-HS	PAW-20PAIRC-HS	PAW-25PAIRC-HS
	PAW-10EAIRC-LS	PAW-15EAIRC-LS	PAW-20EAIRC-LS	PAW-25EAIRC-LS
	PAW-10EAIRC-HS	PAW-15EAIRC-HS	PAW-20EAIRC-HS	PAW-25EAIRC-HS
A	1.0m	1.5m	2.0m	2.5m

Unit: mm


E2 type high static pressure hide-away.

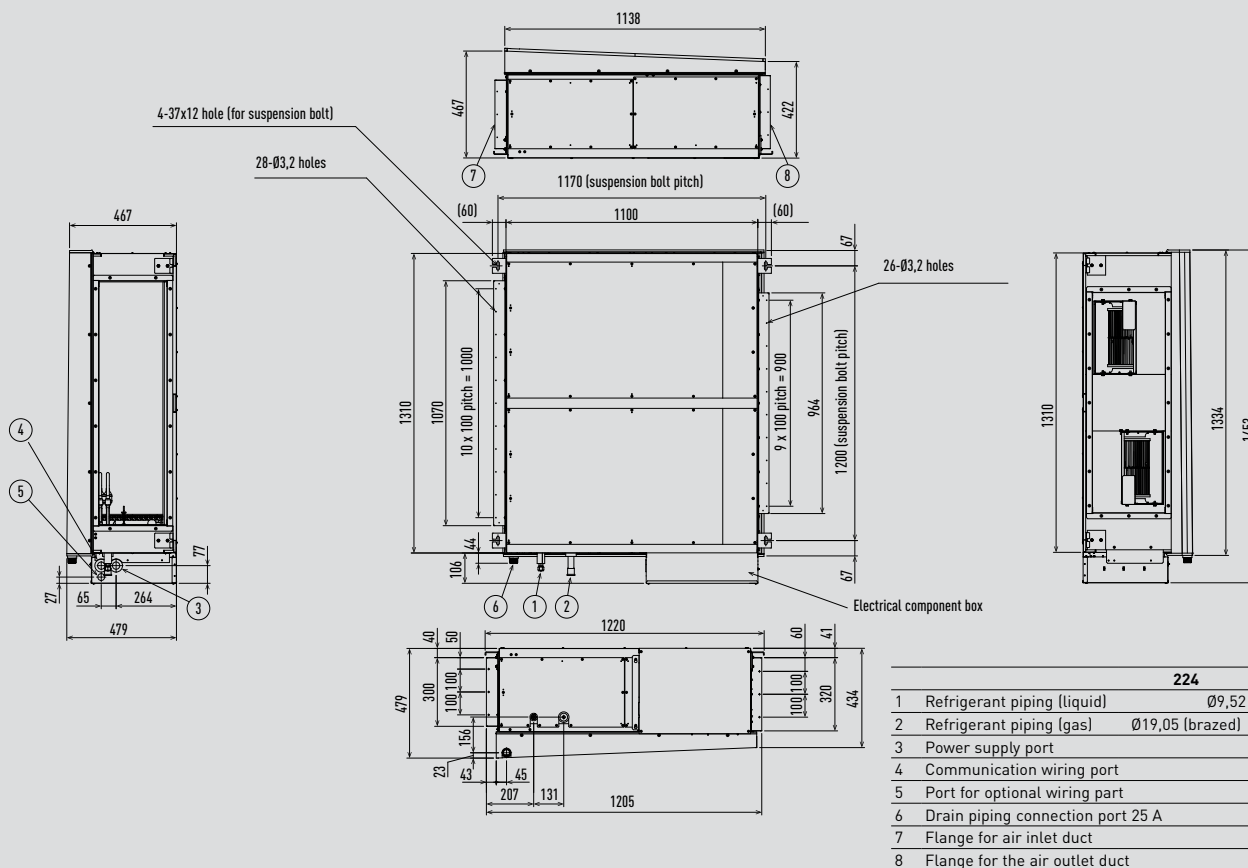

	224	280
1 Refrigerant piping (liquid)	Ø9,52 (flared)	
2 Refrigerant piping (gas)	Ø19,05 (brazed)	Ø22,22 (brazed)
3 Power supply port		
4 Communication wiring port		
5 Port for optional wiring part		
6 Drain piping connection port 25 A		
7 Flange for air inlet duct		
8 Flange for the air outlet duct		


Unit: mm

Ceiling mounted air-e nanoe X Generator.

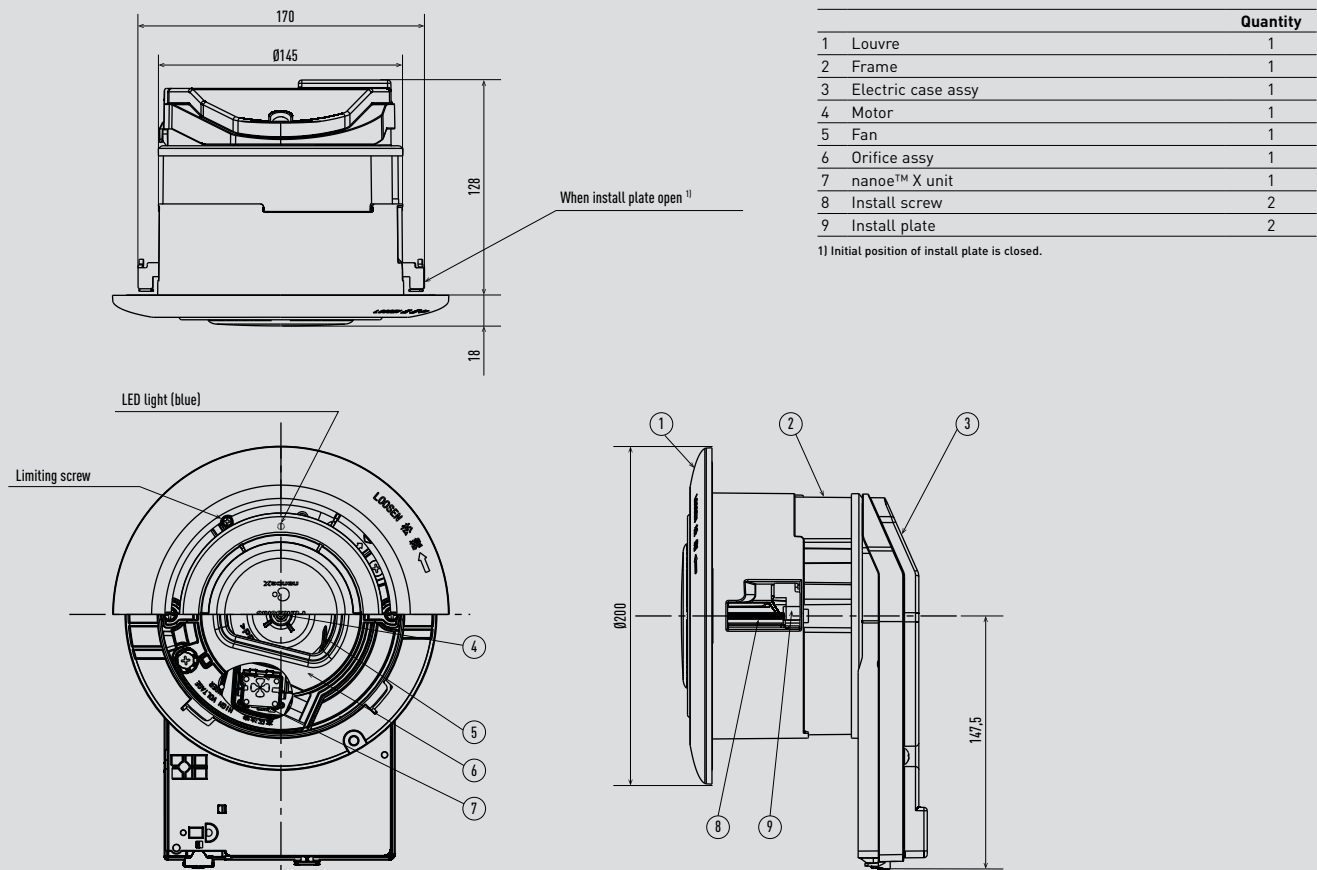

Unit: mm


Heat recovery ventilation unit.

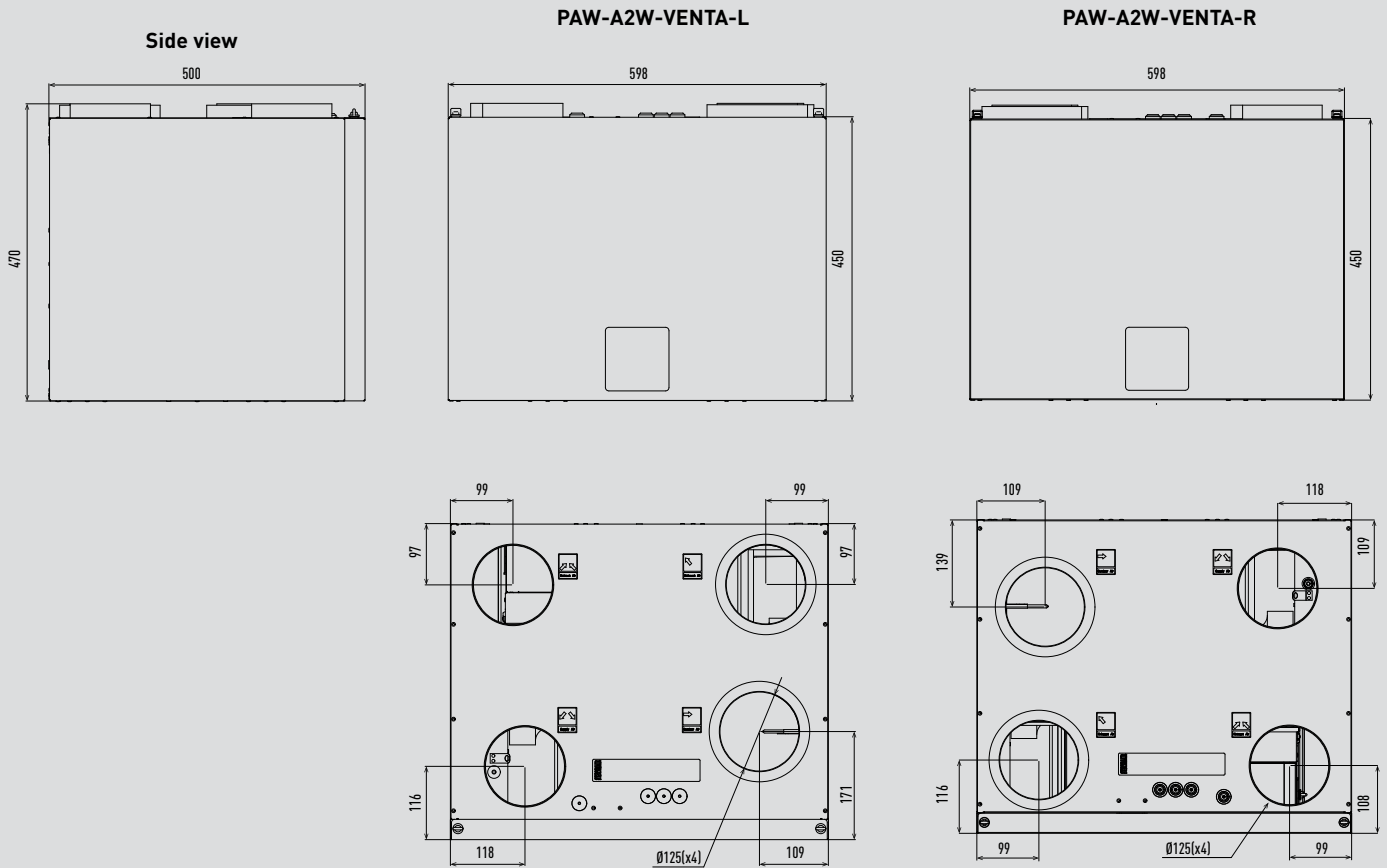

Unit: mm



Counter flow ventilation - PAW-VENTX10Z / PAW-VENTX15Z.

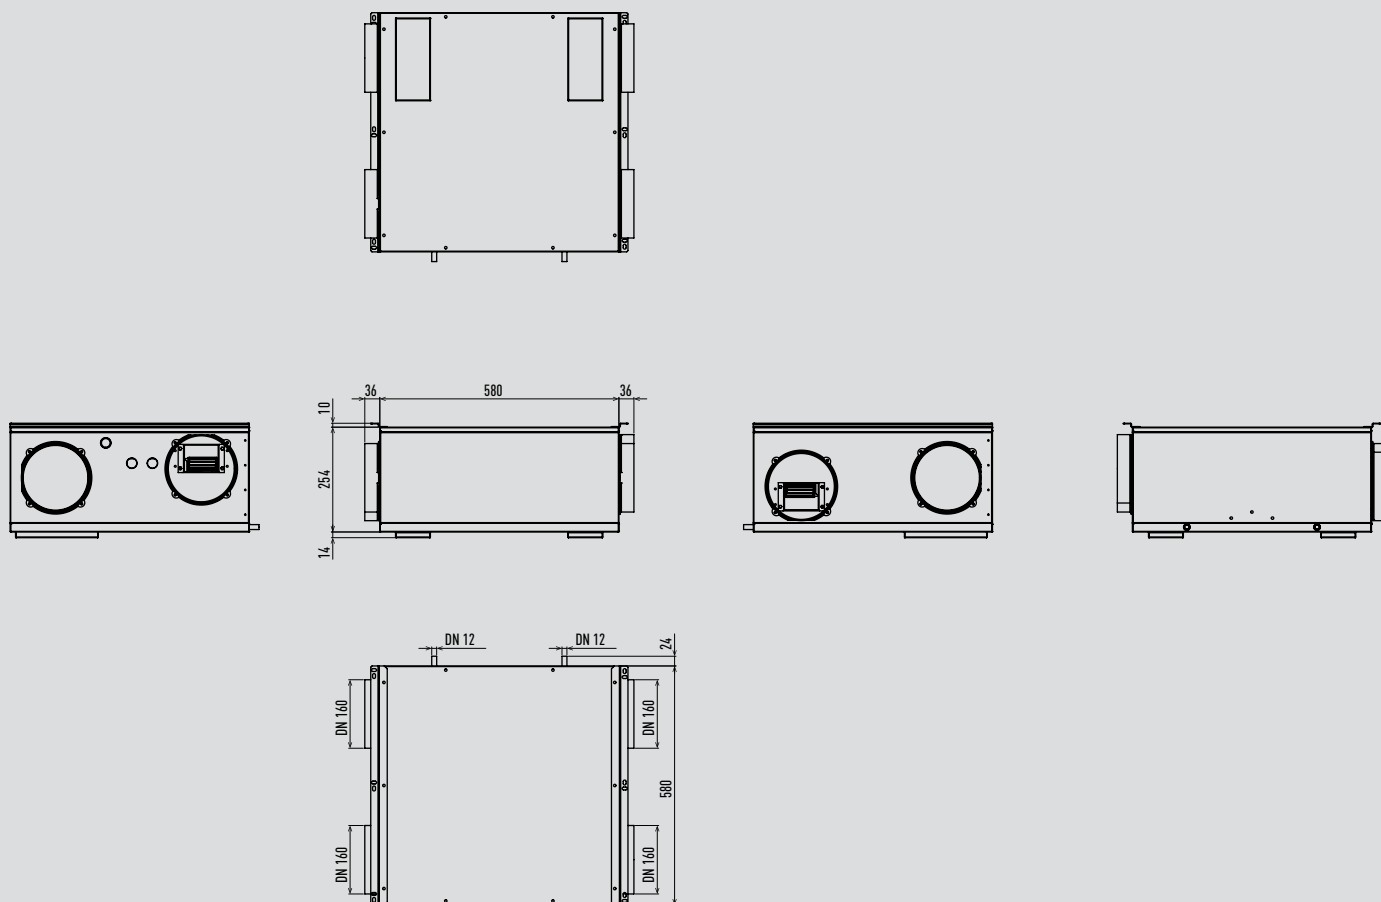


Unit: mm

Counter flow ventilation - PAW-VENTX20H / PAW-VENTX30H / PAW-VENTX40H.

PAW-VENTX20H

PAW-VENTX30H


PAW-VENTX40H

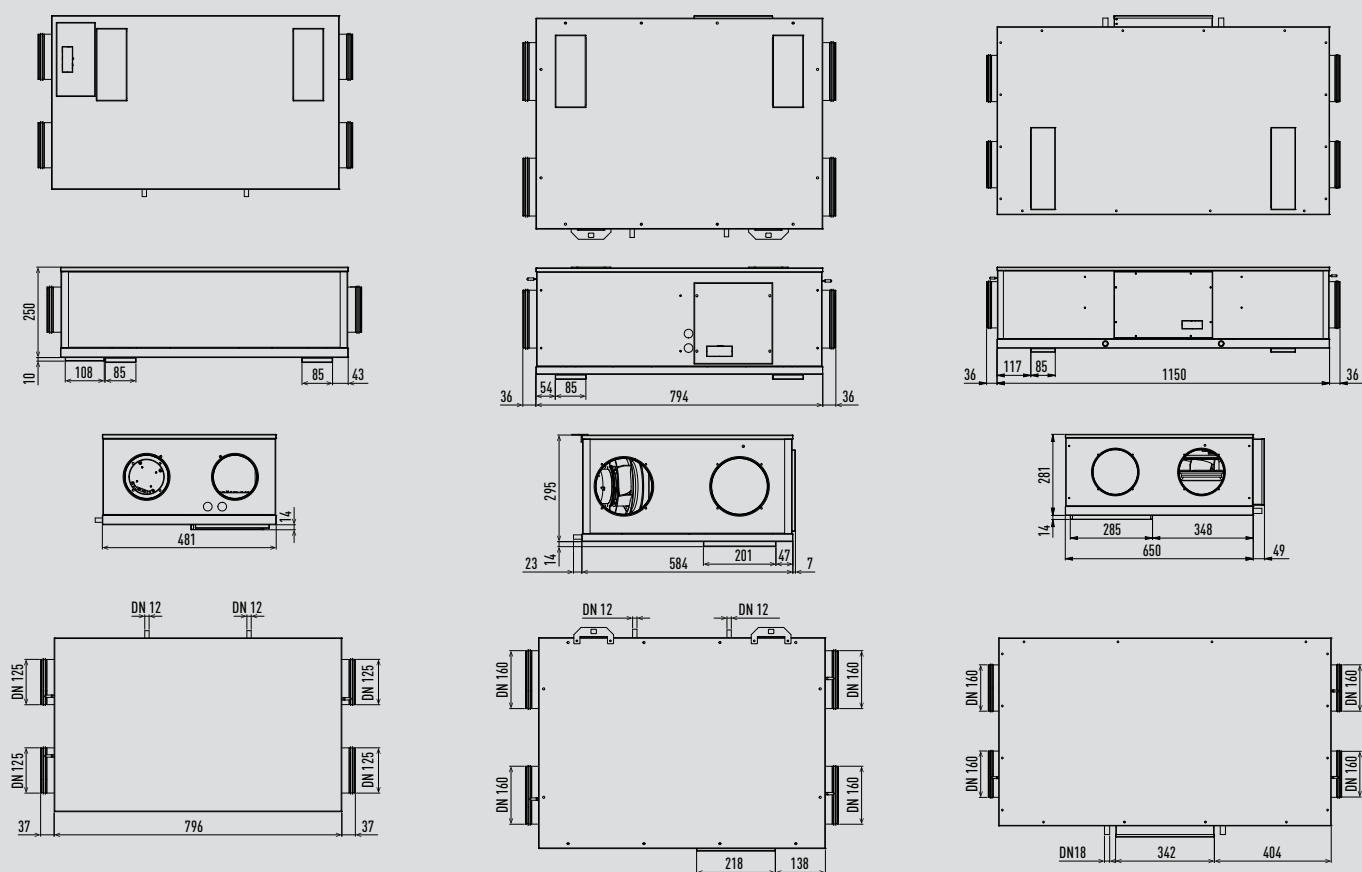


Unit: mm

Counter flow ventilation - PAW-VENTX20V / PAW-VENTX30V / PAW-VENTX40V.


PAW-VENTX20V

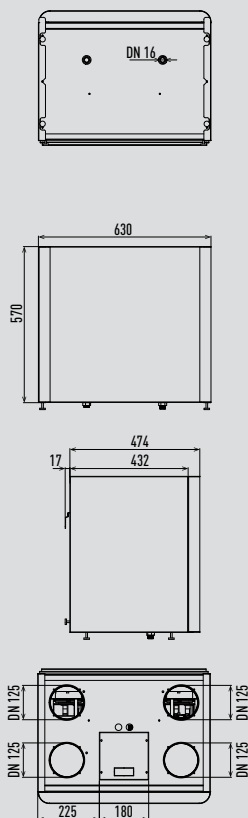

PAW-VENTX30V

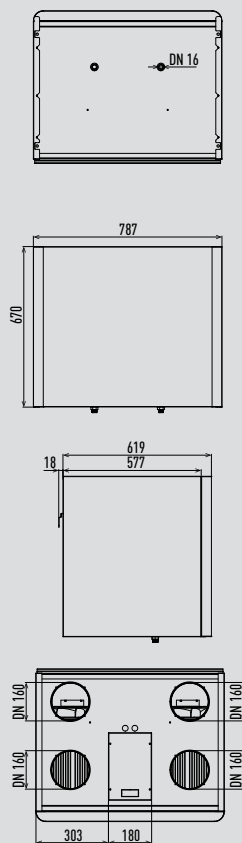


PAW-VENTX40V

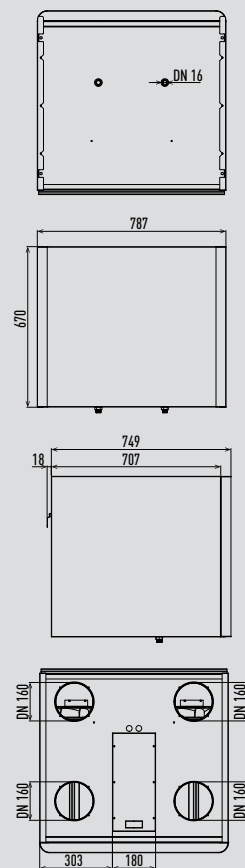

Unit: mm

Room controller for SE8000.

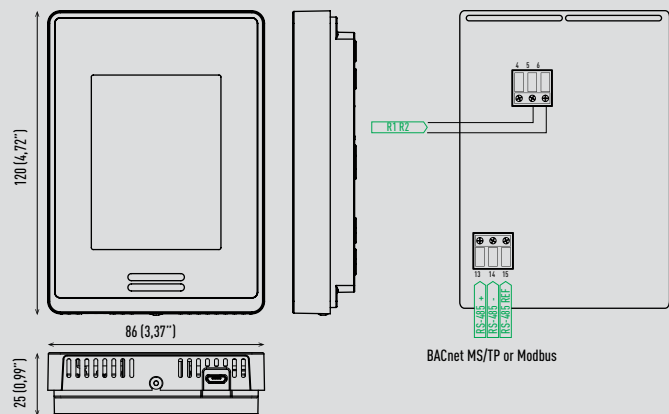

Check with your local government for instruction on disposal of these products.

THIS PRODUCT FOR COMMERCIAL USE ONLY.

**Dimensions:**

Height: 12 cm/4,72 in.
Width: 8,6 cm/3,39 in.
Depth: 2,7 cm/1,06 in.

Power requirements:

16 V DC from Panasonic R-R IDU connectors.
50/60 Hz, 4 VA, Class 2 Supply.

Range from indoor unit:

Recommended 500 ft (150 m).

Operating conditions:

0 °C to 50 °C (32 °F to 122 °F).
0% to 95% R.H. non-condensing.

Storage conditions:

-30 °C to 50 °C (-22 °F to 122 °F).
0% to 95% R.H. non-condensing.

Temperature sensor:

Local 10 K NTC type 2 thermistor.

Temperature sensor resolution:

± 0,1 °C (± 0,2 °F).

Temperature sensor accuracy:

± 0,5 °C (± 0,9 °F) @ 21 °C (70 °F) typical calibrated.

Humidity sensor and calibration:

Single point calibrated bulk polymer type sensor.

Humidity sensor precision:

Reading range from 10% to 90% R.H. non-condensing.

10% to 20% precision: 10%.

20% to 80% precision: 5%.

80% to 90% precision: 10%.

Humidity sensor stability:

Less than 1,0% yearly (typical drift).

Wiring:

Maximum wire length between last indoor unit to SER8150Rx B1194 equals 490 ft (150 m) with AWG #18 wire (0,82 mm²). Refer to Panasonic VRF guidelines "Wiring system diagram for remote controller" for this limitation.

Approximate shipping weight:

0,34 kg (0,75 lb)

Unit: mm

Panasonic service

Our Panasonic Service teams are committed to ensuring your peace of mind. Best service is our aim.

Panasonic provides a team of highly trained technicians and engineers to deliver professional and responsive services that meet the highest levels of quality and safety while being efficient and cost effective.

To find out more about Panasonic Heating & Cooling Solutions, please visit **www.aircon.panasonic.be**.



Maintenance.

To meet the requirements of the standard warranty, the product must be maintained and serviced annually by a suitably trained and qualified engineer. This way we can extend the lifetime of the product.



Repair.

Panasonic offers a wide range of service agreements, like Panasonic Service+ for a maximized product lifetime. Leave the care of your Panasonic products to the experts. In the unlikely event that something goes wrong, trust one of our qualified and Panasonic trained experts to get things back on track.




Warranty.

In accordance with the regulations, Panasonic guarantees its products against hidden defects. Moreover, Panasonic grants to the professional purchaser a commercial warranty, specific to the product families, subject to compliance of all the rules of installation and use of its products.

Panasonic Heating & Cooling Solutions customer service

Panasonic enables different channels for end users or professionals to get in touch with us:



Use our European website **www.aircon.panasonic.be** for contacting us.

Panasonic has implemented a contact page on the Panasonic Heating & Cooling Solutions website for potential or existing Panasonic customers.



Another option is to contact the highly experienced teams at the Panasonic customer service center, who are more than qualified to support Panasonic clients in 13 different languages across Europe.

Our service center in Europe for end customers:

Country	B2C support center	Opening times
Belgium NL	+32 2 320 55 38	Mo-Fr 9-17h
Belgium FR	+32 2 320 55 38	Mo-Fr 9-17h
Luxemburg	+32 2 320 55 38	Mo-Fr 9-17h

Panasonic Marketing Europe GmbH
Panasonic Heating & Ventilation Air-Conditioning Europe
Hagenauer Strasse 43, 65203 Wiesbaden, Germany
www.aircon.panasonic.be

France / Belgium / Luxembourg
Panasonic Solutions Chauffage & Refroidissement
1 à 7 Rue du 19 Mars 1962, 92238, Gennevilliers
Cedex, France
☎ 0800 805 215 (France)
+32 2 320 55 38 (Belgium & Luxembourg)
www.aircon.panasonic.be

Panasonic®

To find out how Panasonic cares for you,
log on to: **www.aircon.panasonic.be**

Panasonic Belgium
Branch of Panasonic Marketing Europe GmbH
Heating & Cooling Solutions - Business location
Dok Noord 3A/404
9000 Gent

Panasonic Belgium
Branch of Panasonic Marketing Europe GmbH
Registered Office
Brusselsesteenweg 159
9090 Melle



Do not add or replace refrigerant other than the specified type. Manufacturer is not responsible for the damage and deterioration in safety due to usage of the other refrigerant.
The outdoor units in this catalogue contains fluorinated greenhouse gases with a GWP higher than 150.

